Aggrelite



Aggrelite

A stylishly minimal terrazzo, Aggrelite is appropriate for use on walls and floors. A range of finishes, sizes, and subtle colours allows Aggrelite to create an understated backdrop for your design features.



Aggrelite &



ABOVE Floor: 3AGG106

Wall: 3AGG106

RIGHT

Floor: 3AGG101 3AGG105






ABOVE Floor: 3AGG101 Wall: 3AGG105




AGG-Beige 3AGG106

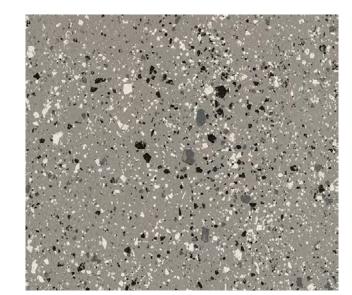

AGG-Grey 3AGG103



AGG-White 3AGG105

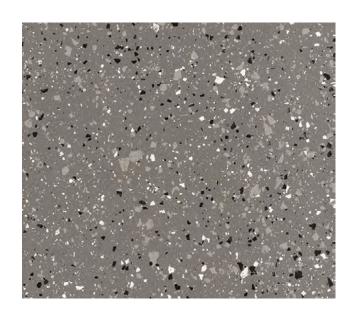

AGG-Ash 3AGG102




AGG-Silver 3AGG104



AGG-Black 3AGG101



SIZES AND FINISHES

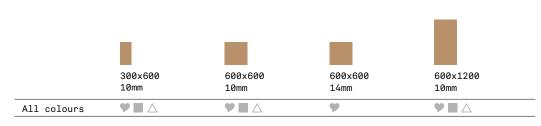

♥ Natural R10 (A+B)*

Polished

shed \triangle Anti Slip R11

NOTES

To avoid lippage we recommend the use of self-levelling spacers.

* Natural R10 (A+B) is not suitable for beach, swimming pool and /or changing rooms.

Aggrelite

APPEARANCE

Terrazzo

MATERIAL

Porcelain - Full Body

USAGE

Floors and Walls

SHADE VARIATION

V3 - Moderate

SPECIAL PIECES

For more information contact our sales team.

BATTISCOPA

90x600mm



GRADONE ASSEMBLATO

1200x330mm



ANGOLARE ASSEMBLATO

1200x330mm



GRADINO

300x600mm 300x1200mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

10. MOISTURE EXPANSION

No rating

3. WATER ABSORPTION

≤ 0.1%

12. FROST RESISTANCE

Conforms

4. FLEXURAL STRENGTH

45 N/mm²

13. CHEMICAL RESISTANCE

Conforms

6. DEEP ABRASION RESISTANCE

> 150 mm³

14. STAIN RESISTANCE

Class 4-5

8. LINEAR THERMAL EXPANSION

6 x10⁻⁶ °C

SLIP RESISTANCE (DIN 51130-51097)

Natural R10 (A+B) Anti Slip R11

9. THERMAL SHOCK RESISTANCE

No rating

MANUFACTURER CERTIFICATIONS:



EPD: Available ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2025. 001a.

EC1M 5RJ