
Drift



Drift

With a design inspired by the ancient rammed earth construction technique the aesthetic of this collection is organic and meditative. Drift comes in large formats intensifying its natural expression.

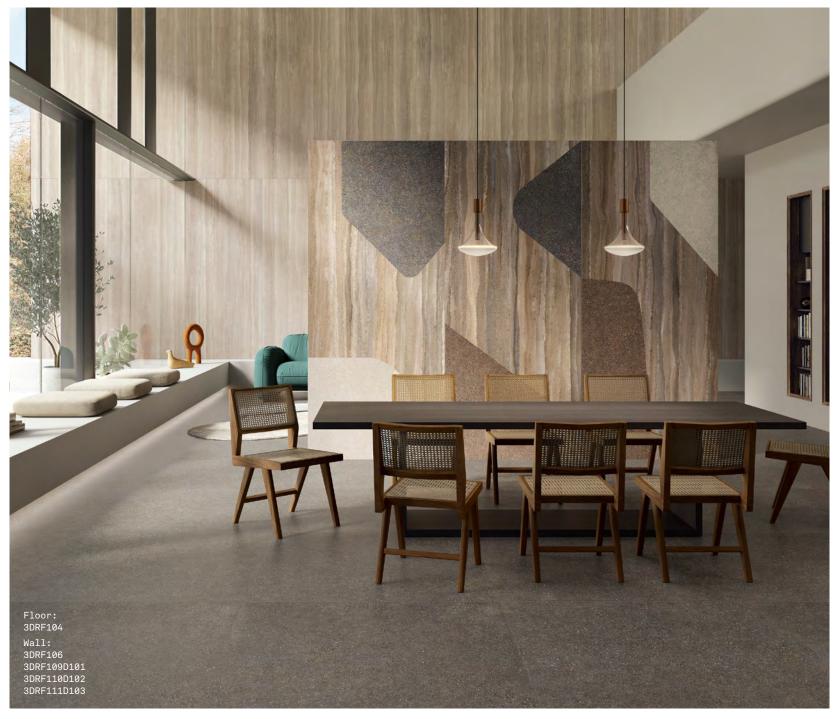

Drift Sus



ABOVE

Floor: 3DRF101

Wall: 3DRF105 3DRF105M102

RIGHT

Floor: 3DRF104

Desk: 3DRF107





ABOVE Floor: 3DRF104 Wall: 3DRF105



DRF-Bone 3DRF101



DRF-Greige 3DRF102



DRF-Brown 3DRF103







DRF-Ivory 3DRF105




DRF-Light 3DRF106



DRF-Sand 3DRF107



DRF-Fossil 3DRF108

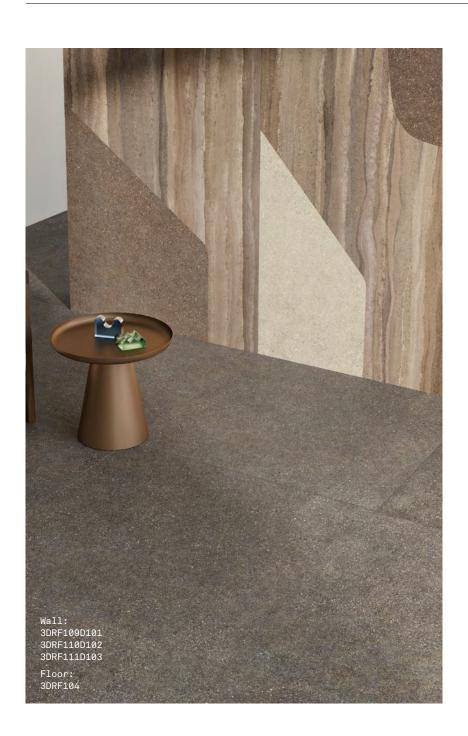

MOSAICS



DRF-Mosaic A
3DRF107M101
300x300x9mm
Matt



DRF-Mosaic B
3DRF105M102
300x300x9mm
Matt



DRF-Mosaic C 3DRF106M103 300x300x9mm Matt

DECORS




DRF-Decor A
3DRF109D101
1200x2800x6mm
Matt




DRF-Decor B
3DRF110D102
1200x2800x6mm
Matt



DRF-Decor C
3DRF111D103
1200x2800x6mm
Matt

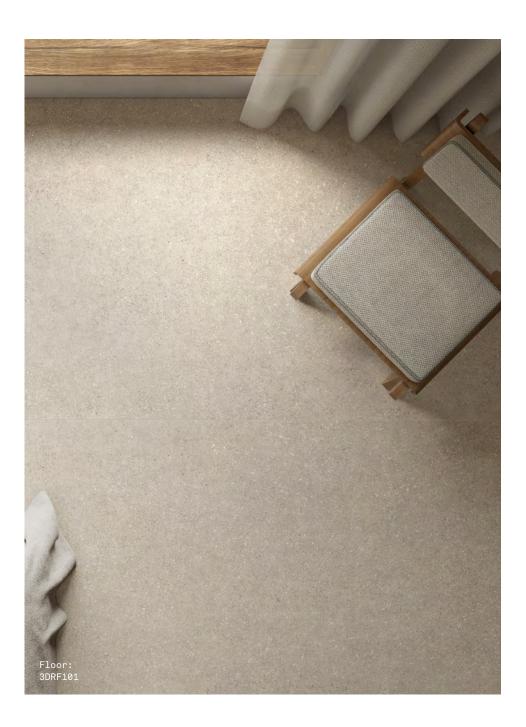

SIZES AND FINISHES

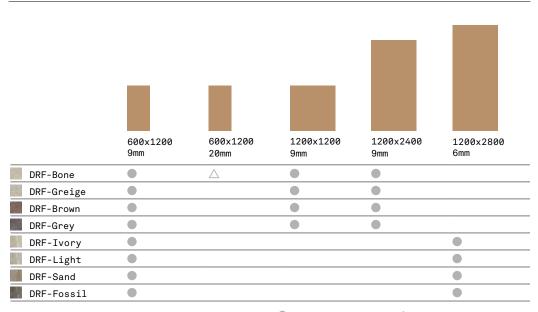

• Matt R10 (A+B) \triangle Anti Slip R11 (A+B+C)

NOTES

To avoid lippage we recommend the use of self-levelling spacers

Drift

APPEARANCE

Stone

MATERIAL

Porcelain

USAGE

Floors and Walls

ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

10. MOISTURE EXPANSION

No rating

3. WATER ABSORPTION

≤ 0.08%

12. FROST RESISTANCE

Conforms

4. FLEXURAL STRENGTH

50-52 N/mm²

13. CHEMICAL RESISTANCE

Conforms

6. DEEP ABRASION RESISTANCE

140 mm³

14. STAIN RESISTANCE

Class 4-5

8. LINEAR THERMAL EXPANSION

No rating

SLIP RESISTANCE (DIN 51130-51097)

Matt R10 (A+B) Anti Slip R11 (A+B+C)

9. THERMAL SHOCK RESISTANCE

Conforms

o. The think of the or the orange

MANUFACTURER CERTIFICATIONS:





EPD: Available ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2024. 001.