S O LUS



Dryland is a porcelain collection available in a warm, neutral palette. Ideal for floors and walls, three decors and a variety of sizes extend the design possibilities achievable with this range.





ABOVE Floor: 3DRY104 Wall: 3DRY109D103

RIGHT Floor: 3DRY103 Wall: 3DRY102







ABOVE Floor: 3DRY107D101




DRY-Light 3DRY101



DRY-Bone 3DRY102



DRY-Tan 3DRY103







DRY-Sand 3DRY104

DRY-Brown 3DRY105 DRY-Copper 3DRY106






DRY-Decor A			
3DRY107D101			
600x1200x9mm			
Matt R10 (A+B)			




DRY-[Decor	r B	
3DRY108D102			
600x1200x9mm			
Matt	R10	(A+B)	



DRY-Decor C 3DRY109D103 600x600x9mm Matt

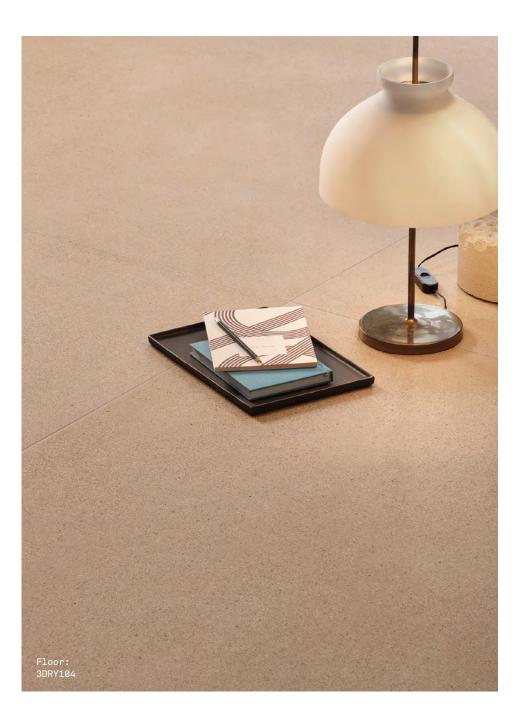

SIZES AND FINISHES

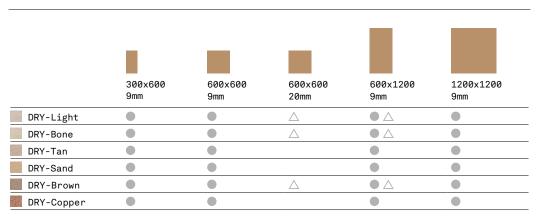

• Matt R10 (A+B) \triangle Anti Slip R11 (A+B+C)

NOTES

To avoid lippage we recommend the use of self-levelling spacers

APPEARANCE Stone

MATERIAL Porcelain

USAGE Floors and Walls

SHADE VARIATION V2 - Light



SPECIAL PIECES

For more information contact our sales team.



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY Conforms **10. MOISTURE EXPANSION** ≤ 0.02 % (0.2 mm/m)

3. WATER ABSORPTION ≤ 0.2%

12. FROST RESISTANCE Conforms

4. FLEXURAL STRENGTH Conforms

14. STAIN RESISTANCE

13. CHEMICAL RESISTANCE

6. DEEP ABRASION RESISTANCE Conforms

Conforms

Conforms

8. LINEAR THERMAL EXPANSION $\leq 7 \ 10^{-6} \cdot C - 1$

SLIP RESISTANCE (DIN 51130-51097) Matt R10 (A+B) Anti Slip R11 (A+B+C)

9. THERMAL SHOCK RESISTANCE Conforms

MANUFACTURER CERTIFICATIONS:

EPD: Available
Declare ISO 14001
ISO 17889-1

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request. All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2024. O01.

BIRMINGHAM Unit 1 Cole River Park Warwick Road B11 2QX LONDON 80 Clerkenwell Road EC1M 5RJ

MANCHESTER 14 Kennedy Street M2 4BY

solusceramics.com
+44 (0)121 753 0777
sales@solusceramics.com