

Echo

6 COLOURS | 3 FINISHES | 4 SIZES | 1 MOSAIC



Echo

Concrete elegance with subtle movement and a broad tonal range. Mosaics and anti-slip finishes make it ideal for high-traffic design.




Floor:
2ECH103
Wall:
2ECH104

Echo



ABOVE
Floor:
2ECH102
Wall:
2ECH102

RIGHT
Floor:
2ECH101
Wall:
2ECH101

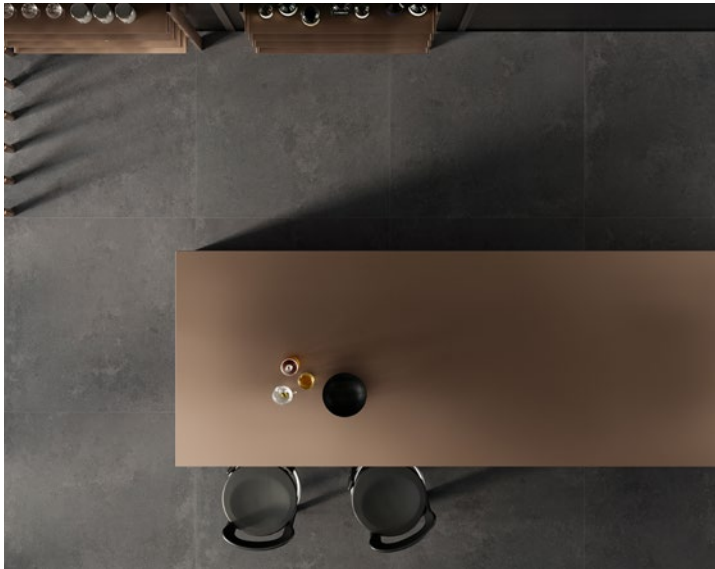

ABOVE
Floor:
2ECH104
Wall:
2ECH104



ECH-White
2ECH104



ECH-Pale
2ECH105



ECH-Grey
2ECH103



ECH-Warm
2ECH106



ECH-Dark
2ECH102




ECH-Black
2ECH101



Floor:
2ECH105

Wall:
2ECH105

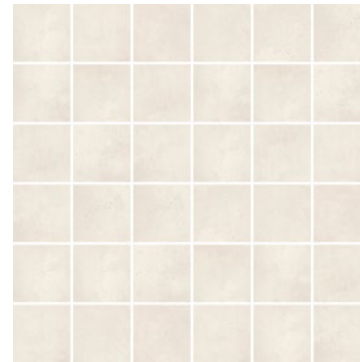


ECH-White Mosaic
2ECH104M001
300x300x10.5mm
Natural R10 (A+B)




ECH-Pale Mosaic
2ECH105M001
300x300x10.5mm
Natural R10 (A+B)




ECH-Grey Mosaic
2ECH103M001
300x300x10.5mm
Natural R10 (A+B)

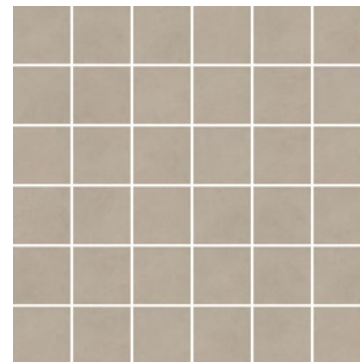

ECH-Warm Mosaic
2ECH106M001
300x300x10.5mm
Natural R10 (A+B)

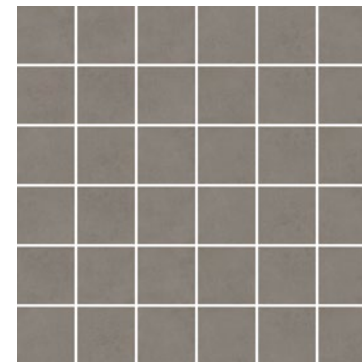

ECH-Dark Mosaic
2ECH102M001
300x300x10.5mm
Natural R10 (A+B)

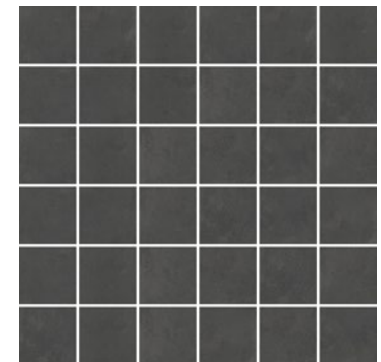





ECH-Black Mosaic
2ECH101M001
300x300x10.5mm
Natural R10 (A+B)



Floor :
2ECH105
2ECH106

SIZES AND FINISHES

				
	300x600 10.5mm	600x600 10.5mm	600x1200 10.5mm	1200x1200 10.5mm
All colours	♥	♥ △	♥ \	♥ \ △
	♥ Natural R10 (A+B)	\ Satin R9 (A)	△ Anti Slip R11 (A+B+C)	

APPEARANCE

Concrete

MATERIAL

Porcelain - Full Body

USAGE

Floors and Walls

SHADE VARIATION

V2 - Light


SPECIAL PIECES

For more information contact our sales team.

SKIRTING


60x600mm

60x1200mm



STEP TREAD

325x1200mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

3. WATER ABSORPTION

$\leq 0.1\%$

4. FLEXURAL STRENGTH

$> 45 \text{ N/mm}^2$

6. DEEP ABRASION RESISTANCE

$< 140 \text{ mm}^3$

8. LINEAR THERMAL EXPANSION

$7.0 \times 10^{-6} \text{ }^\circ\text{C}$

9. THERMAL SHOCK RESISTANCE

Conforms

10. MOISTURE EXPANSION

No rating

12. FROST RESISTANCE

Conforms

13. CHEMICAL RESISTANCE

Conforms

14. STAIN RESISTANCE

Conforms

SLIP RESISTANCE (DIN 51130-51097)

Natural R10 (A+B)

Satin R9 (A)

Anti Slip R11 (A+B+C)

MANUFACTURER CERTIFICATIONS:



EPD: Available

ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2025. 001.