6 COLOURS | 5 FINISHES | 7 SIZES



A subtle and contemporary range of neutral tiles, Eloquent is the perfect architectural solution for designers searching for elegant and versatile colours, formats and finishes. Ideally suited to a range of commercial and residential applications.




S O LUS



S O LUS



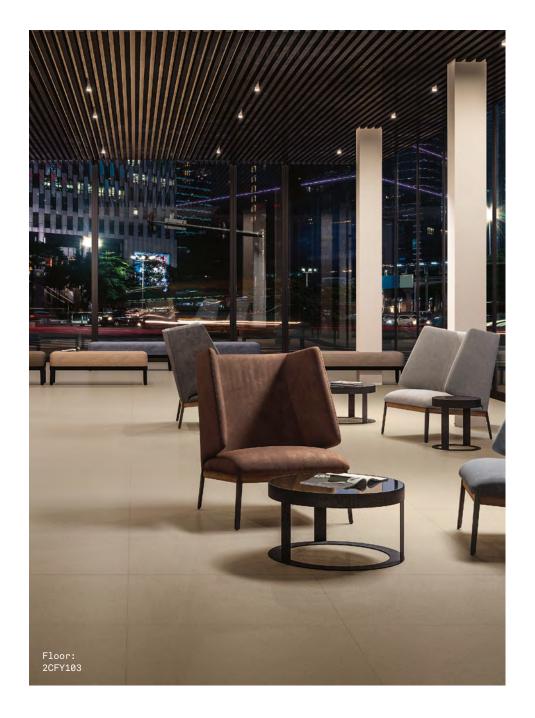

#### SIZES AND FINISHES

300×600 9.5mm	300x600 10mm	600x600 9.5mm	600x600 10mm	600×600 14mm	900x900 10.5mm	900×900 11mm
$\otimes$		$\otimes$	¥ <b></b>		$\bigcirc$	♥■□
$\odot$		$\otimes$	9		$\otimes$	♥■□
$\odot$		$\otimes$	<b>9</b>		$\otimes$	<b>*</b>
$\odot$		$\odot$	<b>9</b>		$\odot$	<b>*</b>
$\otimes$		$\bigcirc$	9		$\bigcirc$	<b>*</b>
$\otimes$		0			0	
			9.5mm     10mm     9.5mm       Image: Second secon	9.5mm     10mm     9.5mm     10mm       0     10mm     0     10mm	9.5mm     10mm     9.5mm     10mm     14mm       0     10mm     0     10mm       0     10mm     0     10mm	9.5mm     10mm     9.5mm     10mm     14mm     10.5mm       0     10     0     10mm     0     0       0     10     10mm     14mm     10.5mm       0     10     10     10mm     14mm     10.5mm       0     10     10     10     0     0       0     10     10     10     0       0     10     10     10     0       0     10     10     10     0

APPEARANCE Mono Colour

MATERIAL Porcelain


USAGE Floors and Walls

SHADE VARIATION V2 - Light SPECIAL PIECES Available in all colours. For more information contact our sales team.

BULLNOSE 80×900mm 80×600mm

**STEP TREAD LINE** 450×800mm 300×600mm

STEP TREAD PLUS 300x600x40mm



#### ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY Conforms

3. WATER ABSORPTION <0.5% 10. MOISTURE EXPANSION No rating

12. FROST RESISTANCE Conforms

13. CHEMICAL RESISTANCE

Conforms

Conforms

14. STAIN RESISTANCE

4. FLEXURAL STRENGTH 50 N/mm<sup>2</sup>

6. DEEP ABRASION RESISTANCE 123 mm<sup>3</sup>

8. LINEAR THERMAL EXPANSION 7x10<sup>-6</sup> °C SLIP RESISTANCE (DIN 51130-51097) Natural R10 (A+B)

Honed R9 Anti Slip R12 (A+B+C)

9. THERMAL SHOCK RESISTANCE No rating

#### MANUFACTURER CERTIFICATIONS:

4



EPD: Available ISO 14001 ISO 17889-1

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request. All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2024. 005.

S O LUS

BIRMINGHAM Unit 1 Cole River Park Warwick Road B11 2QX LONDON 80 Clerkenwell Road EC1M 5RJ

**MANCHESTER** 14 Kennedy Street M2 4BY

solusceramics.com
+44 (0)121 753 0777
sales@solusceramics.com