

Format is an expressive range of concrete tiles that reflect the sights and textures of urban city environments.
With excellent anti slip properties, six shades and thirteen sizes this range provides a total solution.





ABOVE

Wall: 2WDR001

Floor: 2WDR001


Project: Peckham Kitchen Photography by Agnese Sanvito

RIGHT

Project: Brunel House Photography by Peter Savage

Floor: 2WDR001



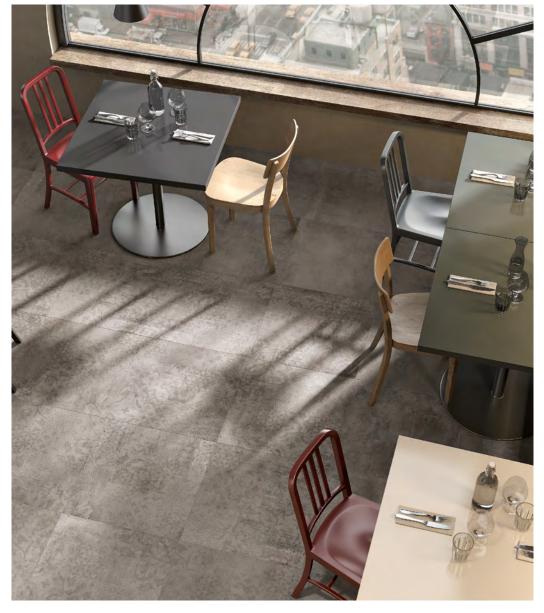

ABOVE Floor: 2WDR002 2WDR002d001








Penzlin 2WDR006

Naila 2WDR005

Passaic 2WDR001



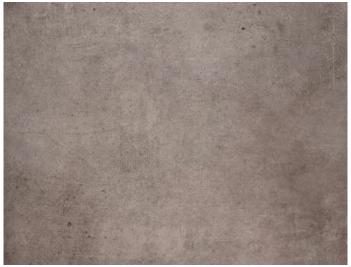




Howell 2WDR002

Gladbeck 2WDR004

Ansbach 2WDR003










Mosaic A

Available in all colours

300x300x8 (31x31 chips)

Natural R10 (A+B)



Mosaic B

Available in all colours

300x300x8 (47x47 chips)

Natural R10 (A+B)

NOTES

^{*} production on request

SIZES AND FINISHES

	300×600 8mm	600×600 8mm	600×600 20mm	600×1200 8mm	600×1200 20mm	750×750 6mm	750×1500 6mm	1000×1000 6mm	1000×1000 20mm	1000×1500 6mm	1000×3000 6mm	1200×1200 6mm	1200×2700 6mm
Penzlin	70	70	•	70	•		_	_					
Naila	70	70	•	70	•		_	_					1
Passaic	70	70	•	70	•				•				
Howell	70	70	•	70	•				•				
Gladbeck	70	70	•	70	•								1
Ansbach	70	70	•	90	•		1	1	•		1	1	

Natural R10 (A) Natural R10 (A+B) Natural R11 (A+B)

APPEARANCE

Concrete

MATERIAL

Porcelain

USAGE

Floors and Walls

SHADE VARIATION

V3 - Moderate

SPECIAL PIECES

Available in all colours. For more information contact our sales team.

BULLNOSE

70x600x8mm 65x750x6mm 65x1000 x 6mm



STEP WITH GROOVES*

300x600x8, 300x1000x6, 300x1200x8, 375x750x6, 375x1500x6mm



NOTES

ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

10. MOISTURE EXPANSION

No rating

3. WATER ABSORPTION

≤ 0.05%

12. FROST RESISTANCE

Conforms

4. FLEXURAL STRENGTH

42 N/mm²

13. CHEMICAL RESISTANCE

Conforms

6. DEEP ABRASION RESISTANCE

140 mm³

14. STAIN RESISTANCE

Class 5

8. LINEAR THERMAL EXPANSION

7x10⁻⁶ °C

SLIP RESISTANCE (DIN 51130-51097)

Natural R10 (A) Natural R10 (A+B) Natural R11 (A+B)

9. THERMAL SHOCK RESISTANCE

Conforms

MANUFACTURER CERTIFICATIONS:



ecovadis



EPD: Available ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2024. 012.

> 40% Pre-consumer



^{*} production on request