



A blissful union between the industrial appearance of cement and the natural elegance of stone, Inventive is a highly sophisticated range, perfectly suited for both internal and external environments.



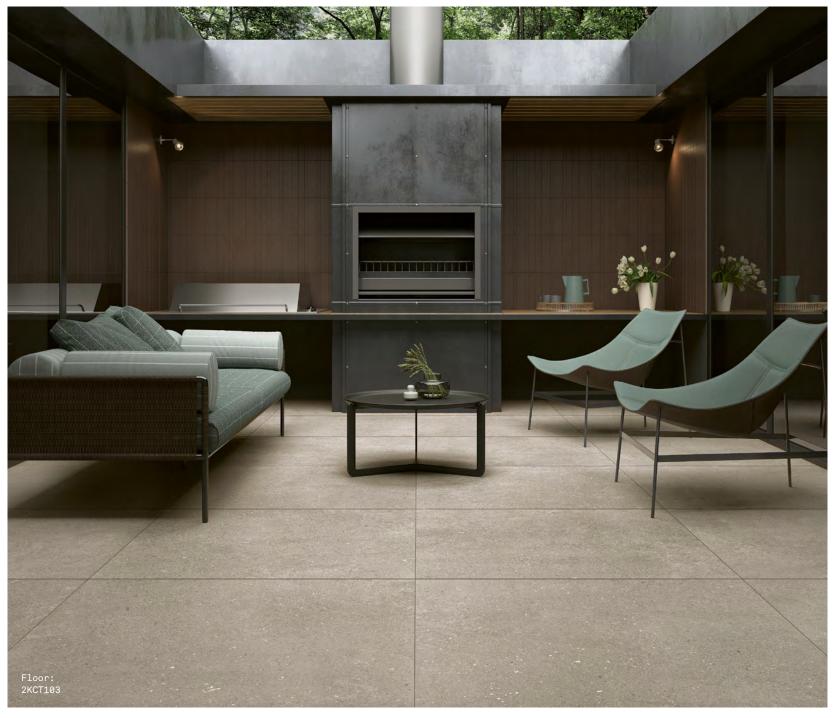

ABOVE Floor: 2KCT104

RIGHT Floor: 2KCT104

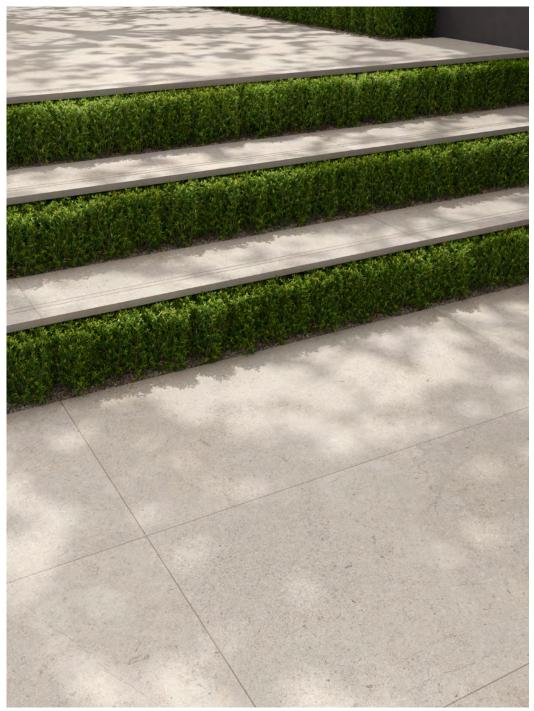



Imagination 2KCT104



Interpreted 2KCT102




Innovatory 2KCT103



Inspiring 2KCT101

## SIZES AND FINISHES

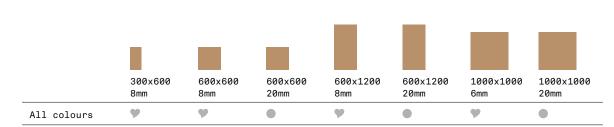

▼ Natural R10 (A+B) ■ Natural R11 (A+B+C)

## MOSAICS




Mosaic A

Available in all colours

300x300x8mm (4.7x4.7mm chips)

Natural R10 (A+B)



Mosaic B

Available in all colours

300x300x8mm (3.1x3.1 chips)

Natural R10 (A+B)

**APPEARANCE** 

Concrete

MATERIAL

Porcelain - Full Body

USAGE

Floors and Walls

SHADE VARIATION

V3 - Moderate

SPECIAL PIECES

Available in all colours.

For more information contact our sales team.

**BULLNOSE PLINTH** 

65x1000x6.5mm 70x600x8mm

STEP TREAD

300x600x8mm 300x1000x8mm 300x1200x8mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

10. MOISTURE EXPANSION

No rating

3. WATER ABSORPTION

≤ 0.5%

12. FROST RESISTANCE

Conforms

4. FLEXURAL STRENGTH

 $> 48 \text{ N/mm}^2$ 

13. CHEMICAL RESISTANCE

Conforms

6. DEEP ABRASION RESISTANCE

140 mm<sup>3</sup>

14. STAIN RESISTANCE

Class 5

8. LINEAR THERMAL EXPANSION

7 MK<sup>-1</sup>

SLIP RESISTANCE (DIN 51130-51097)

Natural R10 (A+B) Natural R11 (A+B+C)

9. THERMAL SHOCK RESISTANCE

Conforms

o. ITIERWINE OFFICER REGIOTATION

MANUFACTURER CERTIFICATIONS:



ecovadis



EPD: Available ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2024. 003.