

Lakeland

5 COLOURS | 3 FINISHES | 9 SIZES | 2 MOSAICS



S
O
LUS



Floor:
2LAK102

Lakeland

This porcelain stoneware collection combines the technical performance of ceramic with the aesthetic of natural stone. Suitable for walls and floor, exteriors and interiors, Lakeland is inspired by various limestones of Northern Europe.



S
O
LUS



Solus Plus ranges are responsibly sourced in line with the BES 6001 standard.

For more information, [click here](#)

Floor:
2LAK102

Lakeland



ABOVE
Floor:
2LAK101
Wall:
2LAK101

RIGHT
Floor:
2LAK103
Wall:
2LAK103



ABOVE
Floor:
2LAK101



LAK-Ice
2LAK103



LAK-Cream
2LAK105



LAK-Sand
2LAK102



LAK-Ash
2LAK101



LAK-Grey
2LAK104



SIZES AND FINISHES


	300x600 9mm	600x600 9mm	600x1200 9mm	600x600 20mm	800x800 9mm	800x800 20mm	1200x1200 9mm	1200x1200 20mm	1200x2780 6mm
LAK-Ice	● △	● △	△ ▲		△	▲	△ ▲	▲	●
LAK-Cream	● △	● △	△ ▲		△	▲	△ ▲		●
LAK-Sand	● △	● △	△ ▲ ●	▲	△	▲	△ ▲	▲	●
LAK-Ash	● △	● △	△ ▲	▲	△	▲	△ ▲	▲	●
LAK-Grey	● △	● △	△ ▲	▲	△		△ ▲	▲	

● Matt R10 (A+B) △ Natural ▲ Anti Slip R11 (A+B+C)

MOSAICS



Mosaic A
Natural
300x300x9mm
Available in all colours

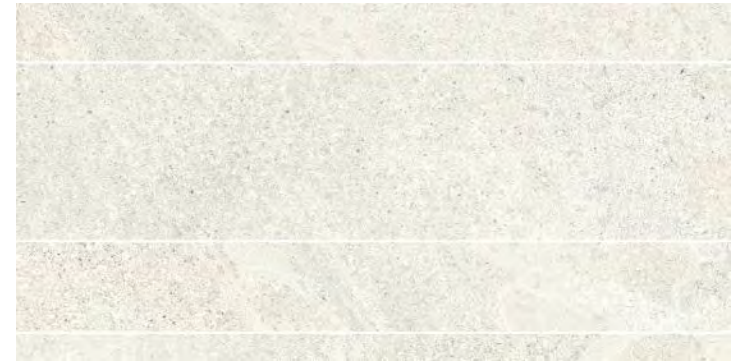

Mosaic B
Natural
300x600x9mm
Available in all colours

APPEARANCE

Limestone

MATERIAL

Porcelain

USAGE

Floors and Walls

SHADE VARIATION


V3 - Moderate

SPECIAL PIECES

Available in all colours.
For more information contact our sales team.

BATTISCOPIA

70x600mm
70x800mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY
Conforms

3. WATER ABSORPTION
0.2%

4. FLEXURAL STRENGTH
Conforms

6. DEEP ABRASION RESISTANCE
Conforms

8. LINEAR THERMAL EXPANSION
 $\leq 7 \cdot 10^{-6} \cdot C^{-1}$

9. THERMAL SHOCK RESISTANCE
Conforms

10. MOISTURE EXPANSION
 $\leq 0,02 \% (0,2 \text{ mm/m})$

12. FROST RESISTANCE
Conforms

13. CHEMICAL RESISTANCE
Conforms

14. STAIN RESISTANCE
Conforms

**SLIP RESISTANCE
(DIN 51130-51097)**
Matt R10 (A+B)
Anti Slip R11 (A+B+C)

CERTIFICATIONS:



For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request. All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2026. 005.

The logo consists of the word "SOLUS" in a large, white, sans-serif font, stacked vertically. To the right of the word "SOLUS" is a green circular icon containing a white plus sign (+).

S
O
L
U
S

About Solus Plus

Solus Plus is our new mark of assurance for responsibly sourced products. Built on the rigorous standards of BES 6001, it highlights collections produced by factories that demonstrate industry-leading sustainability across their entire supply chain, from raw material extraction to final delivery.

When specified through Solus, these products can contribute valuable credits toward BREEAM, LEED and WELL certification, helping you meet your environmental targets without compromising on quality or design. Look for the Solus Plus symbol to specify with confidence.

[Visit our website to learn more.](#)

[Back to top](#)