
Lightroom



Lightroom is concreteeffect porcelain collection with three contrasting finishes that stimulate the tactile sense. Available in five gentle colours, Lightroom lends itself to modern architecture through its variety of sizes, shapes, and possible applications.






LIT-White 2LIT110




LIT-Ash 2LIT111




LIT-Tan 2LIT113



LIT-Marine 2LIT114



LIT-Grey 2LIT112

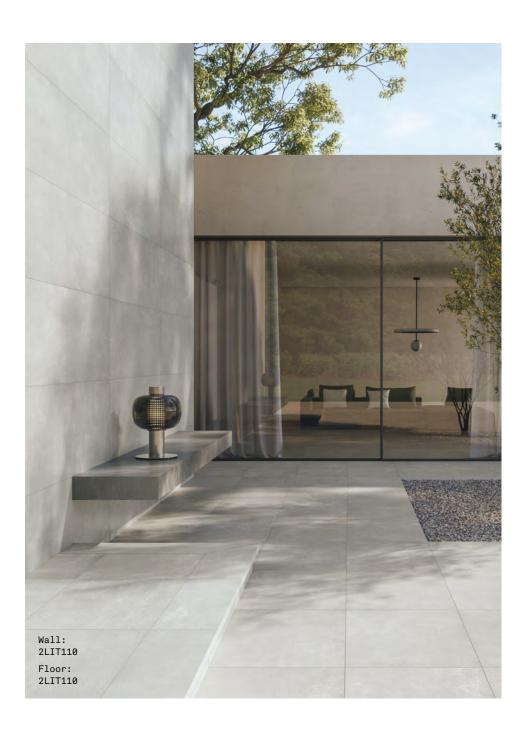

SIZES AND FINISHES

	300×600 9mm	600×600 9mm	600×600 20mm	600×1200 9mm	800x800 9mm	1200×1200 9mm
LIT-White				• 🛇 💠		• • •
LIT-Ash				• 🛇 💠		• • •
LIT-Tan				• 🛇 💠		• • •
LIT-Marine	• 🛇			• 🛇 💠		• • •
LIT-Grey	• 0	• 🛇		• • •	•	• • •

DECORS



2LIT110D001 1150x1200mm

2LIT111D002 1150x1200mm Textured Textured

2LIT113D004 1150x1200mm Textured

2LIT114D005 1150x1200mm Textured

2LIT112D003 1150x1200mm Textured

Lightroom

APPEARANCE

Concrete

MATERIAL

Porcelain

USAGE

Floors and Walls

SPECIAL PIECES

For more information contact our sales team.

SKIRTING

70×1200mm 70×800mm 70×600mm ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

10. MOISTURE EXPANSION

≤ 0.02 % (0.2 mm/m)

3. WATER ABSORPTION

0.2%

12. FROST RESISTANCE

Conforms

4. FLEXURAL STRENGTH

Conforms

13. CHEMICAL RESISTANCE

Conforms but not valid for Polished finish

6. DEEP ABRASION RESISTANCE

Conforms

14. STAIN RESISTANCE

Conforms

8. LINEAR THERMAL EXPANSION

≤ 7 10⁻⁶·C⁻¹

SLIP RESISTANCE (DIN 51130-51097)

Matt R10 (A+B) Textured R11 (A+B+C) Anti Slip R11 (A+B+C)

9. THERMAL SHOCK RESISTANCE

Conforms

MANUFACTURER CERTIFICATIONS:

EPD: Available

Declare ISO 14001

ISO 17889-1

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2024. 003a.

