

Marbalite 1

21 COLOURS | 7 FINISHES | 4 SIZES



S
O
S
LUS



Floor:
3MLB109

Marbalite 1

An exploration of 21 colours, Marbalite 1 offers user the authenticity of the natural material in the form of porcelain.

S
O
LUS

Solus Plus ranges are responsibly sourced in line with the BES 6001 standard.

For more information, [click here](#)



Floor:
3MLB134
Counter:
3MLB105

Marbalite 1



ABOVE
Floor:
3MLB136

RIGHT
Floor:
3MLB134



ABOVE
Floor:
3MLB133



Bronson
3MLB101



Wyatt
3MLB105




Vivian
3MLB102



Althaia
3MLB113



Calliope
3MLB135

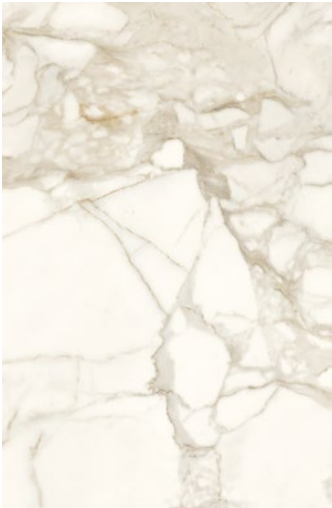

Aegeus
3MLB115



Leyna
3MLB133



Elissa
3MLB116



Eliza
3MLB126




Evangeline
3MLB125



Nestor
3MLB117



Kyros
3MLB127

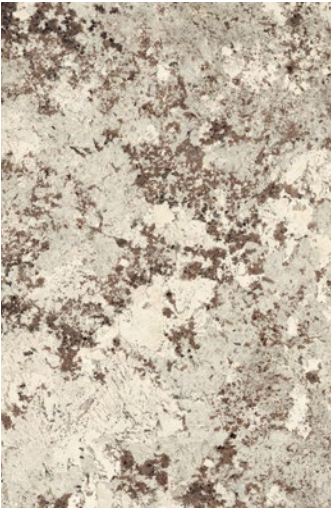

Zendo
3MLB124



Isadora
3MLB137



Ariadne
3MLB136



Roxane
3MLB114




Arete
3MLB134



Allegra
3MLB109



Marilee
3MLB123

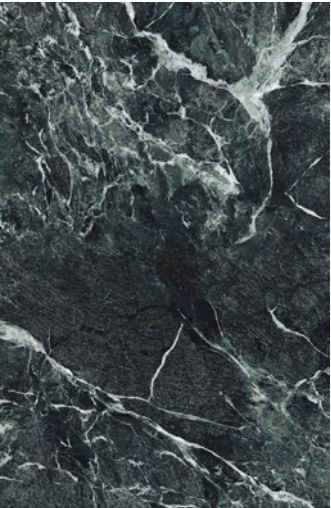

Damaris
3MLB121



Zana
3MLB112



SIZES AND FINISHES

	 375x750 6mm	 600x600 8mm	 600x1200 8mm	 1200x1200 8mm
Bronson		 	 	
Wyatt		  	  	
Vivian		 	 	
Althaia		  	  	
Calliope				
Aegeus		 	 	
Leyna				
Elissa		  	  	
Evangeline				
Nestor		 	 	
Eliza		 	 	 
Kyros				
Zendo		 	 	 
Isadora				
Ariadne				
Roxane		 	 	
Arete				
Allegra		  	  	
Marilee				
Damaris		 	 	
Zana				

 Polished  Polished Texture R9 (A)  Polished Texture R10 (A+B)  Textured
 Natural R9 (A)  Natural R10 (A+B)  Satin

Marbalite 1

APPEARANCE
Marble


MATERIAL
Porcelain

USAGE
Floors and Walls


SHADE VARIATION
V2 - Light
V3 - Moderate

SPECIAL PIECES.
For more information contact our sales team.

BATTISCOPIA
90x600mm



GRADINO STEP
300x600mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY
Conforms

3. WATER ABSORPTION
0.1 - 0.08%

4. FLEXURAL STRENGTH
45-48 N/mm²

6. DEEP ABRASION RESISTANCE
140 mm³

8. LINEAR THERMAL EXPANSION
7x10⁻⁶ °C

9. THERMAL SHOCK RESISTANCE
Conforms

10. MOISTURE EXPANSION
No rating

12. FROST RESISTANCE
Conforms

13. CHEMICAL RESISTANCE
Conforms

14. STAIN RESISTANCE
Conforms

**SLIP RESISTANCE
(DIN 51130-51097)**
Natural R9 (A)
Natural R10 (A+B)
Polished Texture R9 (A)
Polished Texture R10 (A+B)

CERTIFICATIONS:



EPD: Available
ISO 14001
SASO-Approved

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request. All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2026. 014.

> 40%
Pre-consumer



Solus Plus ranges are responsibly sourced in line with the BES 6001 standard for the responsible sourcing of construction products.

BIRMINGHAM
Unit 1 Cole River Park
Warwick Road B11 2QX

LONDON
80 Clerkenwell Road
EC1M 5RJ

MANCHESTER
14 Kennedy Street
M2 4BY

solusceramics.com
+44 (0)121 753 0777
sales@solusceramics.com

The logo features the word "SOLUS" in a large, white, sans-serif font, stacked vertically. To the right of the "O" is a green circular icon containing a white plus sign (+). The background of the entire page is a photograph of large mounds of brown soil or sand, with a vertical wooden plank standing in the center.

SOLUS

About Solus Plus

Solus Plus is our new mark of assurance for responsibly sourced products. Built on the rigorous standards of BES 6001, it highlights collections produced by factories that demonstrate industry-leading sustainability across their entire supply chain, from raw material extraction to final delivery.

When specified through Solus, these products can contribute valuable credits toward BREEAM, LEED and WELL certification, helping you meet your environmental targets without compromising on quality or design. Look for the Solus Plus symbol to specify with confidence.

[Visit our website to learn more.](#)

[Back to top](#)