

Nova Terra

19 COLOURS | 3 FINISHES | 10 SIZES



SOLUS

Floor:
2NTR117
Wall:
2NTR102

Nova Terra

Nova Terra delivers a grounded stone effect with a clean, architectural finish. Robust and versatile, it provides a reliable foundation for contemporary commercial and mixed-use projects.




Floor:
2NTR110
Wall:
2NTR102



Floor:
2NTR110
Wall:
2NTR107
2NTR106

LIMESTONE APPEARANCE COLOURS

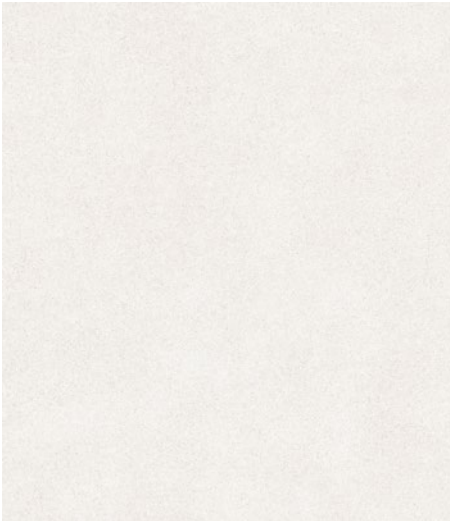

NTR-White
2NTR102



NTR-Ivory
2NTR104



NTR-Beige
2NTR101



NTR-Taupe
2NTR105



NTR-Clay
2NTR108



NTR-Pearl
2NTR106




NTR-Grey
2NTR103



NTR-Coal
2NTR107

CONCRETE APPEARANCE COLOURS

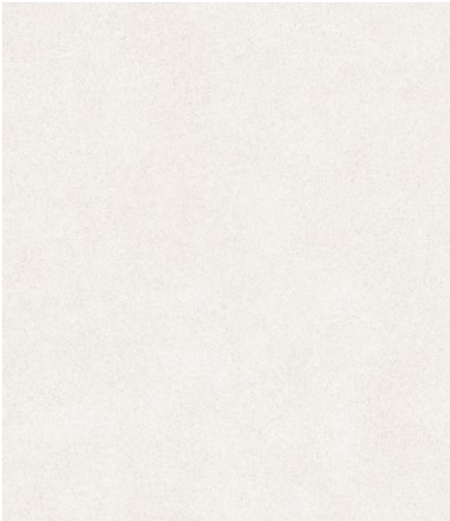

NTR-Light
2NTR113



NTR-Bone
2NTR115



NTR-Pale
2NTR112



NTR-Tan
2NTR116




NTR-Warm
2NTR119



NTR-Cool
2NTR117



NTR-Ash
2NTR114

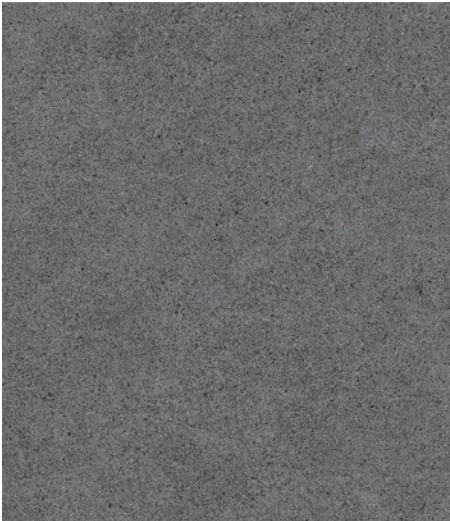

NTR-Dark
2NTR118

STONE APPEARANCE COLOURS



NTR-Snow
2NTR109



NTR-Sand
2NTR111



NTR-Cloud
2NTR110

SIZES AND FINISHES

	300x600 7.8mm	600x600 7.8mm	600x600 20mm	600x900 20mm	600x1200 7.8mm	600x1200 20mm	1000x1000 20mm	1200x1200 7.8mm	1200x2800 6mm	1600x1600 8mm
NTR-White										
NTR-Ivory										
NTR-Beige										
NTR-Taupe										
NTR-Clay										
NTR-Pearl										
NTR-Grey										
NTR-Coal										
NTR-Light										
NTR-Bone										
NTR-Pale										
NTR-Tan										
NTR-Warm										
NTR-Cool										
NTR-Ash										
NTR-Dark										
NTR-Snow										
NTR-Sand										
NTR-Cloud										

Matt R9 Matt R10 Anti Slip R11 (A+B+C)

NOTES

To avoid lippage we recommend the use of self-levelling spacers

APPEARANCE

Limestone
Concrete
Stone

MATERIAL

Porcelain

USAGE

Floors and Walls

SHADE VARIATION

V2 - Light

SPECIAL PIECES

For more information contact our sales team.

ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

3. WATER ABSORPTION

0.1-0.5%

4. FLEXURAL STRENGTH

35-45 N/mm²

6. DEEP ABRASION RESISTANCE

No rating

8. LINEAR THERMAL EXPANSION

7x10⁻⁶ °C

9. THERMAL SHOCK RESISTANCE

Conforms

10. MOISTURE EXPANSION

No rating

12. FROST RESISTANCE

Conforms

13. CHEMICAL RESISTANCE

Conforms

14. STAIN RESISTANCE

Class 5

SLIP RESISTANCE
(DIN 51130-51097)

Matt R9
Matt R10
Anti Slip R11 (A+B+C)

MANUFACTURER CERTIFICATIONS:

EPD: Available
ISO 14001
SASO-Approved

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request. All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2026. 001.

BIRMINGHAM

Unit 1 Cole River Park
Warwick Road B11 2QX

LONDON

80 Clerkenwell Road
EC1M 5RJ

MANCHESTER

14 Kennedy Street
M2 4BY

solusceramics.com
+44 (0)121 753 0777
sales@solusceramics.com