Outdoor Essentials



Our Outdoor Essentials collection comes in a range of wood and stone effects and a versatile, neutral palette. Larger formats, 20mm thickness, and special pieces make this an essential collection for outdoor surfacing.



Outdoor Essentials



ABOVE Floor: 30UT111


RIGHT Floor: 30UT104





ABOVE Floor: 30UT115



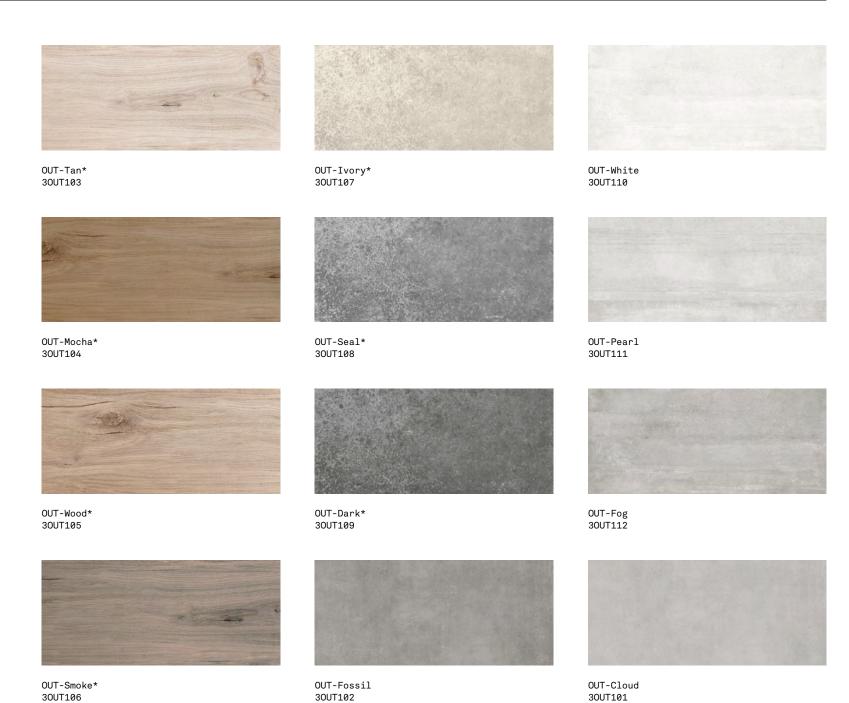



OUT-Night 30UT125



OUT-Sterling 30UT116



OUT-Light* 30UT122



OUT-Salt 30UT117



OUT-Silver* 30UT124



OUT-Taupe 30UT114



OUT-Snow 30UT115



OUT-Grey 30UT120



OUT-Brown* 30UT121



OUT-Cream 30UT113




OUT-Charcoal* 30UT123



OUT-Frost 30UT119



OUT-Pale 30UT118

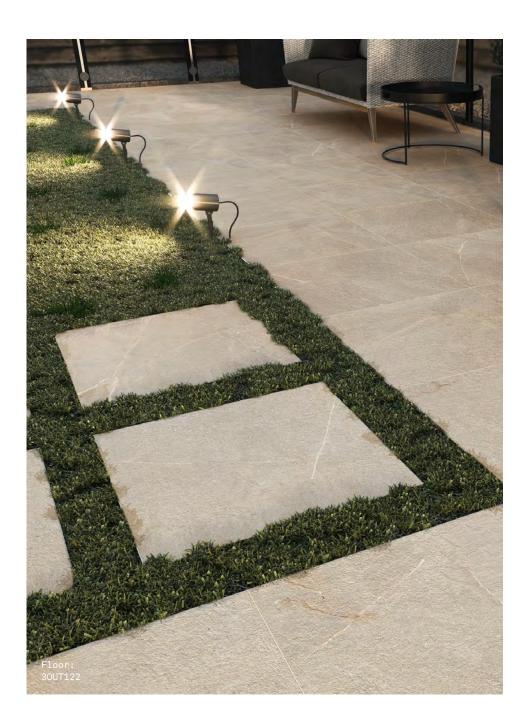

SIZES AND FINISHES

| | 300×1200 | 600×600 | 600×1200 | 900×900 |
|---------------|-------------|-------------|-------------|-------------|
| | 20mm | 20mm | 20mm | 20mm |
| OUT-White | | | \triangle | |
| OUT-Pearl | | | \triangle | |
| OUT-Fog | | | \triangle | |
| OUT-Cloud | | | | \triangle |
| OUT-Ivory* | | \triangle | | |
| OUT-Seal* | | \triangle | | |
| OUT-Dark* | | \triangle | | |
| OUT-Fossil | | | | \triangle |
| OUT-Tan* | \triangle | | | |
| OUT-Mocha* | \triangle | | | |
| OUT-Wood* | \triangle | | | |
| OUT-Smoke* | \triangle | | | |
| OUT-Salt | | | \triangle | |
| OUT-Snow | | | \triangle | |
| OUT-Cream | | | Δ | |
| OUT-Pale | | | Δ | |
| OUT-Light* | | \triangle | | |
| 0UT-Taupe | | | \triangle | |
| OUT-Brown* | | \triangle | | |
| OUT-Frost | | | Δ | |
| OUT-Sterling | | | Δ | |
| OUT-Silver* | | \triangle | | |
| OUT-Grey | | | \triangle | |
| OUT-Charcoal* | | \triangle | | |
| OUT-Night | | \triangle | | |

 \triangle Anti Slip R11 (A+B+C)

NOTES

To avoid lippage we recommend the use of self-levelling spacers

Outdoor Essentials

APPEARANCE

Stone

MATERIAL

Porcelain

USAGE

Floors and Walls

SHADE VARIATION

V2 - Light, *V3 Moderate **SPECIAL PIECES**

For more information contact our sales team.

PELDAÑO ROMO

300x600mm

PELDAÑO INTEGRAL

300x600mm



PELDAÑO REDONDO

300x600mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

10. MOISTURE EXPANSION

No rating

Conforms

3. WATER ABSORPTION

≤ 0.1% - 0.5% Max Individual 0.6% 12. FROST RESISTANCE

4. FLEXURAL STRENGTH

>35-45 N/mm²

13. CHEMICAL RESISTANCE

Conforms

6. DEEP ABRASION RESISTANCE

Min 175 mm³

14. STAIN RESISTANCE

>3 - 5

8. LINEAR THERMAL EXPANSION

6.7x10⁻⁶ °C

SLIP RESISTANCE (DIN 51130-51097)

Anti Slip R11 (A+B+C)

9. THERMAL SHOCK RESISTANCE

Conforms

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2024. 001a.

EC1M 5RJ