
Panelling

6 COLOURS | 1 FINISH | 1 SIZE



Panelling

A striking wall tile with three convex bars. Panelling is available in seven subtle colours. Its glossy surface is resistant to extremes of pH and temperature, allowing wet area and exterior applications.

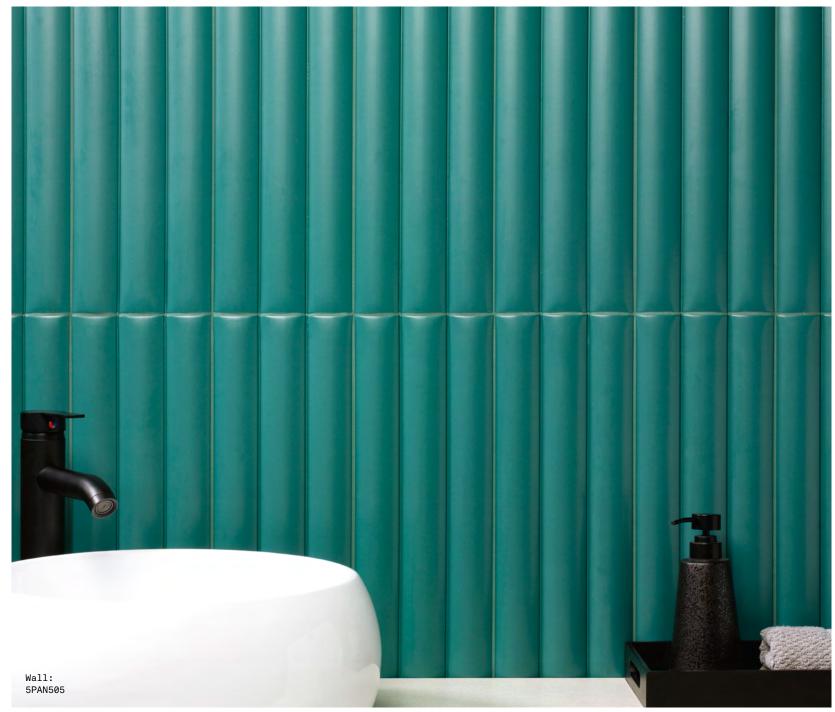



5PAN501





PAN-Aqua 5PAN503



PAN-Turquoise 5PAN505



PAN-Ocean 5PAN504



PAN-Black 5PAN506

Panelling

APPEARANCE Mono Colour	SIZES AND FINISHES		ISO 10545 RESULTS	
MATERIAL Ceramic USAGE Walls only	150×400 15mm		2. DIMENSIONS AND SURFACE QUALITY Conforms	10. MOISTURE EXPANSION No rating
	All colours	• Satin	3. WATER ABSORPTION No rating	12. FROST RESISTANCE Conforms
			4.FLEXURAL STRENGTH No rating	13. CHEMICAL RESISTANCE Conforms
	IMPORTANT NOTICE		6. DEEP ABRASION RESISTANCE	14. STAIN RESISTANCE

IMPORTANT NOTICE

Please be aware that this product is an extruded item designed to achieve a unique rustic aesthetic. Due to the nature of the manufacturing process, variations in size and form are inherent. This characteristic is intentional and adds to the charm of the product. We recommend reviewing this with your clients to ensure they are aware of and accept these variations before purchase.

8. LINEAR THERMAL EXPANSION No rating

9. THERMAL SHOCK RESISTANCE

No rating

No rating

For LEED, BREEAM and WELL information, please ask for details. NCS Colour values are available upon request. All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2024. 001.

No rating

S O LUS

BIRMINGHAM Unit 1 Cole River Park Warwick Road B11 2QX

LONDON 80 Clerkenwell Road EC1M 5RJ

MANCHESTER 14 Kennedy Street M2 4BY

solusceramics.com +44 (0)121 753 0777 sales@solusceramics.com