

Polarity

5 COLOURS | 2 FINISHES | 5 SIZES



S
O
L
U
S

Floor:
3JHF104
Counter:
3JHF103
Stairs:
3JHF102
Wall:
3JHF102

Polarity

Featuring large chips, in charcoal, ivory and vibrant multi-coloured patterns, the striking terrazzo-effect Polarity range is perfect for composing eye-catching designs.




Floor:
3JHF101


Polarity



Floor:
3JHF104

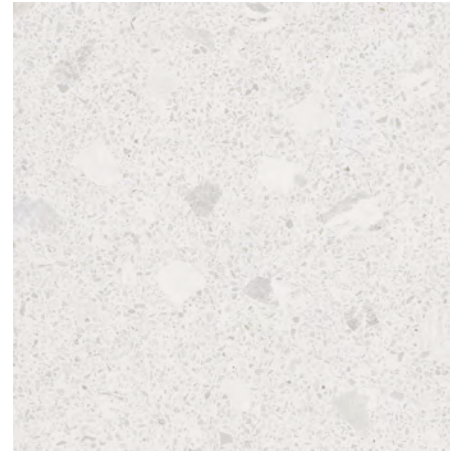

Negative
3JHF104

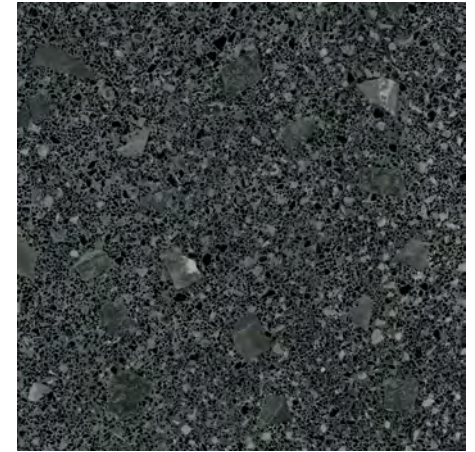


Positive
3JHF103



Electrical
3JHF105



Twyning
3JHF102

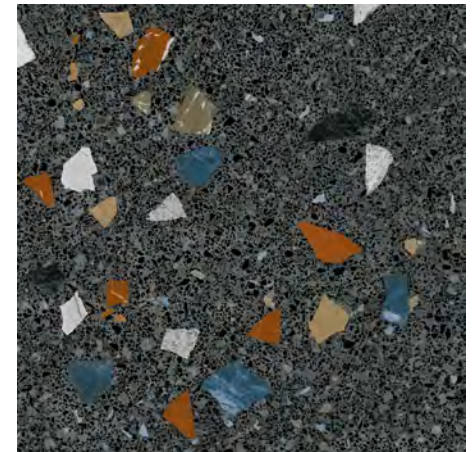

Conductor
3JHF101



Floor:
3JHF104
3JHF103
3JHF105
Wall:
3JHF104
3JHF105

	600x600 10mm	600x1200 11mm	793x793 11mm	800x800 10.5mm	1200x1200 11mm
● Negative	●	●	■	●	●
● Positive	●	●	■	●	
● Twyning	●	●	■	●	●
● Conductor	●	●	■	●	
■ Electrical				●	

● Matt R10 ■ Polished

Polarity

APPEARANCE

Terrazzo

MATERIAL

Porcelain

USAGE

Floors and Walls


SPECIAL PIECES

Available in all colours.

For more information contact our sales team.


SKIRTING

94x1200mm, 94x800mm,
94x793mm, 94x600mm




STEP TREAD

330x1200mm, 330x800mm,
330x600mm



GRADONE

330x1200mm, 330x800mm,
330x600mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

3. WATER ABSORPTION

$\leq 0.5\%$

4. FLEXURAL STRENGTH

$> 35 \text{ N/mm}^2$

6. DEEP ABRASION RESISTANCE

No rating

8. LINEAR THERMAL EXPANSION

$9 \times 10^{-6} \text{ }^\circ\text{C}$

9. THERMAL SHOCK RESISTANCE

Conforms

10. MOISTURE EXPANSION

No rating

12. FROST RESISTANCE

Conforms

13. CHEMICAL RESISTANCE

Conforms

14. STAIN RESISTANCE

Class 4

SLIP RESISTANCE (DIN 51130)

Matt R10

MANUFACTURER CERTIFICATIONS:

EPD: Available

ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE.
© Solus Ceramics Limited 2023. 002a.