

Quarry

5 COLOURS | 2 FINISHES | 1 SIZE



SOS
LUS

Floor:
3GDA104

Quarry


The bold Quarry range comes in five neutral colours, and a high slip resistance. The series is inspired by traditional Mediterranean styles and colours and is practical, stylish and classic.




Floor:
3GDA104




Grey
3GDA106

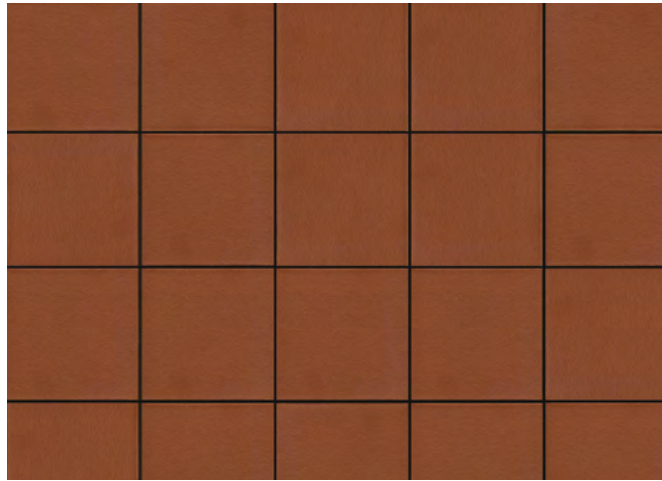


Red
3GDA101

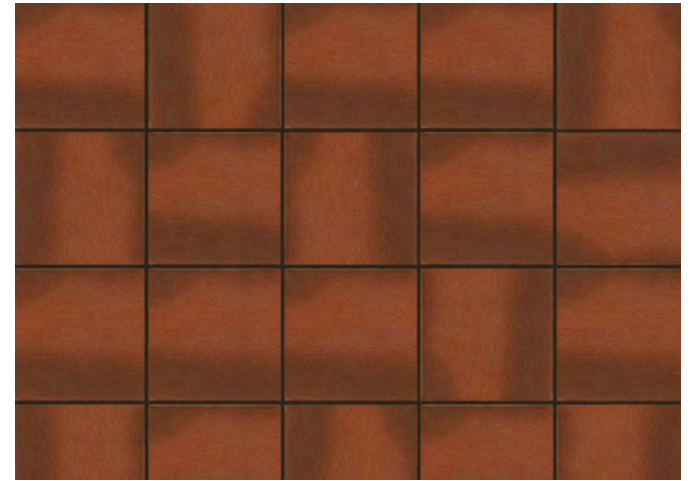

Flame Red
3GDA102

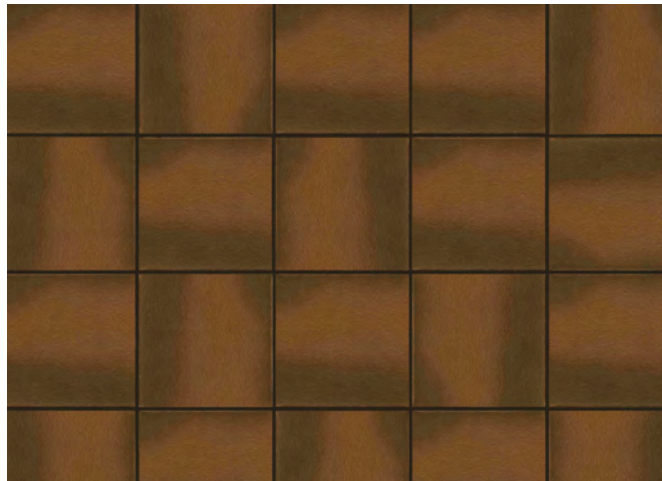

Flame Brown
3GDA104

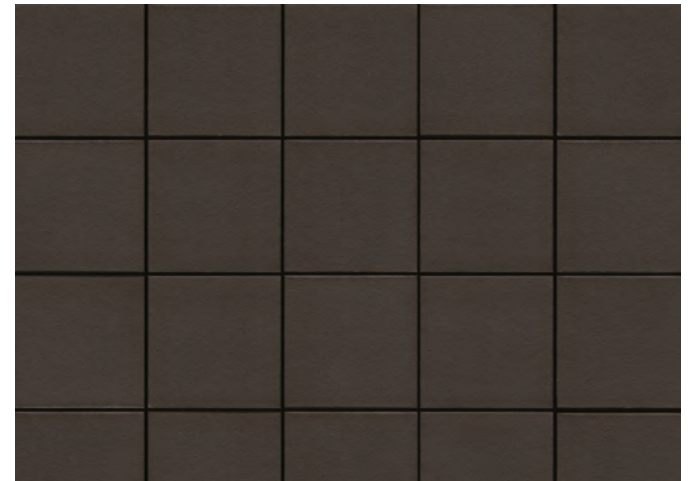

Black
3GDA105



Floor:
3GDA101

SIZES AND FINISHES

	■	150x150 12mm
■ Grey	♥	
■ Red	♥	
■ Flame Red	♥	
■ Flame Brown	♥	
■ Black	♥ △	

♥ Natural R11 (A+B+C) △ Anti Slip R13

NOTES

A 6-8mm wide installation joint is recommended.

Quarry

APPEARANCE

Terracotta

MATERIAL

Klinker

USAGE

Floors and Walls

SHADE VARIATION

V1 - Uniform

V3 - Moderate

SPECIAL PIECES

For more information contact our sales team.

EDGE

150x150mm



INTERNAL ANGLE

20x150mm



STAIR TREAD CORNER

150x150mm



EXTERNAL ANGLE

20x150mm



SKIRTING BOARD

150x150mm

150x195mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

3. WATER ABSORPTION

$3 < E \leq 6\%$

4. FLEXURAL STRENGTH

50 N/mm²

6. DEEP ABRASION RESISTANCE

290-393 mm³

8. LINEAR THERMAL EXPANSION

$5.2 \times 10^{-6} \text{ } ^\circ\text{C}$

9. THERMAL SHOCK RESISTANCE

Conforms

10. MOISTURE EXPANSION

No rating

12. FROST RESISTANCE

Conforms

13. CHEMICAL RESISTANCE

Conforms

14. STAIN RESISTANCE

Class 5

SLIP RESISTANCE (DIN 51130-51097)

Natural R11 (A+B+C)

Anti Slip R13

MANUFACTURER CERTIFICATIONS:

EPD: Available

ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2024. 014.