

# Quarry

5 COLOURS | 2 FINISHES | 1 SIZE



SO  
LUS

Floor:  
3GDA101

# Quarry


The bold Quarry range comes in five neutral colours, and a high slip resistance. The series is inspired by traditional Mediterranean styles and colours and is practical, stylish and classic.




Floor:  
3GDA106




Grey  
3GDA106

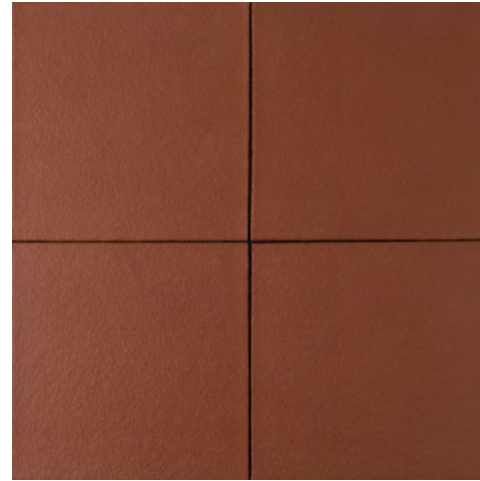

Red  
3GDA101

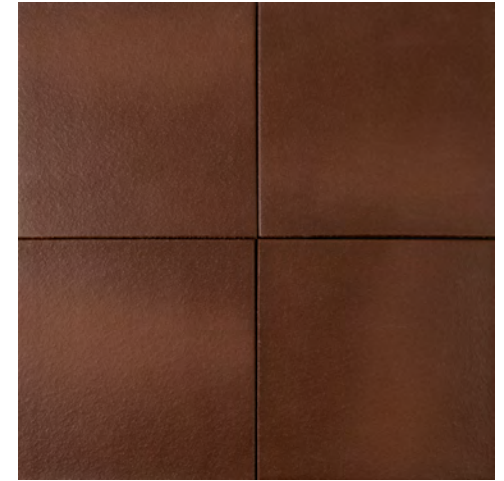

Flame Red  
3GDA102

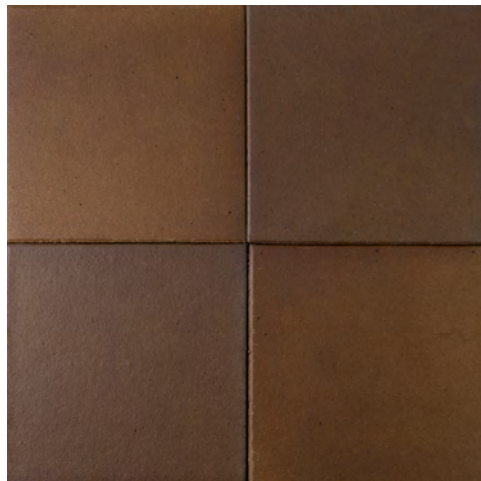

Flame Brown  
3GDA104



Black  
3GDA105



Floor:  
3GDA101

## SIZES AND FINISHES

	■	150x150 12mm
■ Grey	♥	
■ Red	♥	
■ Flame Red	♥	
■ Flame Brown	♥	
■ Black	♥ △	

♥ Natural R11 (A+B+C)    △ Anti Slip R13

## NOTES

A 6-8mm wide installation joint is recommended.

# Quarry

## APPEARANCE

Terracotta

## MATERIAL

Klinker

## USAGE

Floors and Walls

## SHADE VARIATION

V1 - Uniform

V3 - Moderate

## SPECIAL PIECES

For more information contact our sales team.

### EDGE

150x150mm



### INTERNAL ANGLE

20x150mm



### STAIR TREAD CORNER

150x150mm



### EXTERNAL ANGLE

20x150mm



### SKIRTING BOARD

150x150mm

150x195mm



## ISO 10545 RESULTS

### 2. DIMENSIONS AND SURFACE QUALITY

Conforms

### 3. WATER ABSORPTION

$3 < E \leq 6\%$

### 4. FLEXURAL STRENGTH

50 N/mm<sup>2</sup>

### 6. DEEP ABRASION RESISTANCE

290-393 mm<sup>3</sup>

### 8. LINEAR THERMAL EXPANSION

$5.2 \times 10^{-6} \text{ } ^\circ\text{C}$

### 9. THERMAL SHOCK RESISTANCE

Conforms

### 10. MOISTURE EXPANSION

No rating

### 12. FROST RESISTANCE

Conforms

### 13. CHEMICAL RESISTANCE

Conforms

### 14. STAIN RESISTANCE

Class 5

### SLIP RESISTANCE (DIN 51130-51097)

Natural R11 (A+B+C)

Anti Slip R13

## MANUFACTURER CERTIFICATIONS:

EPD: Available

ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2024. 014.