




Beautifully toned with a variety of speckles and irregular layers, the Stonework range effortlessly reproduces the look of natural limestone. Available in vast number of sizes and finishes.




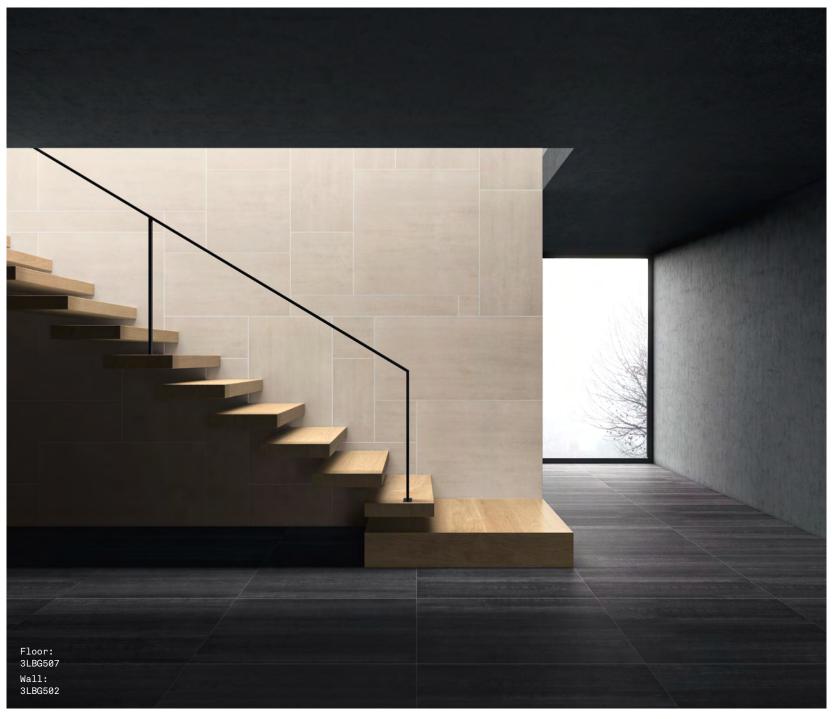


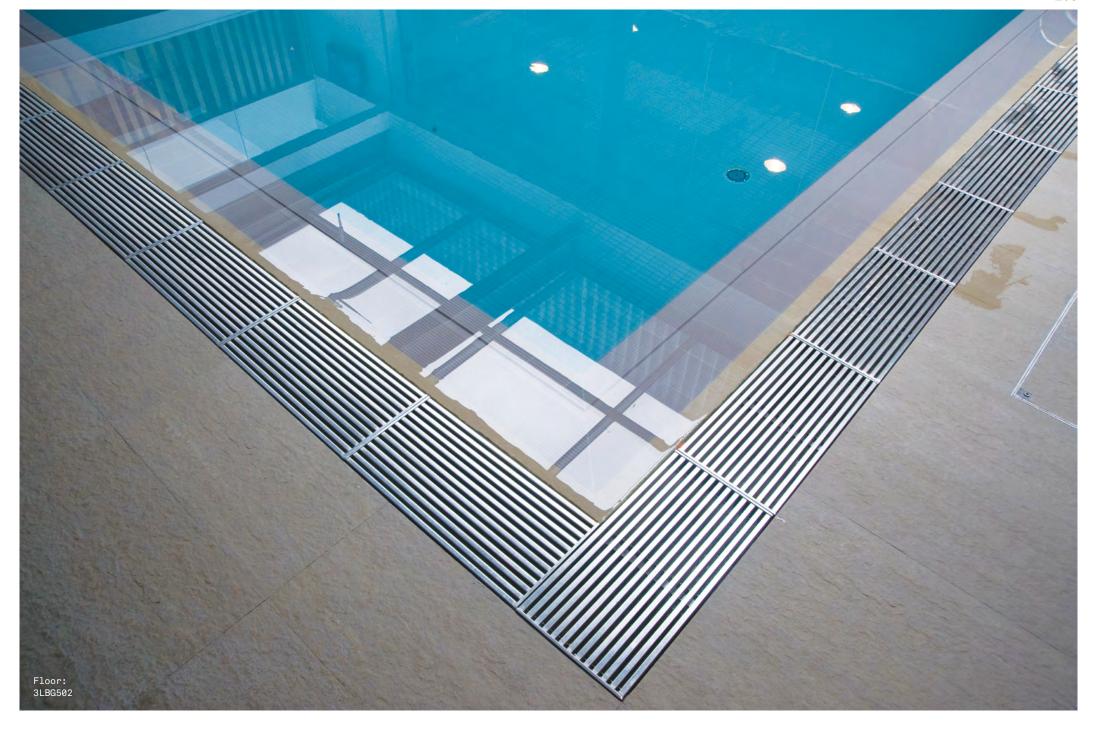

SIZES AND FINISHES



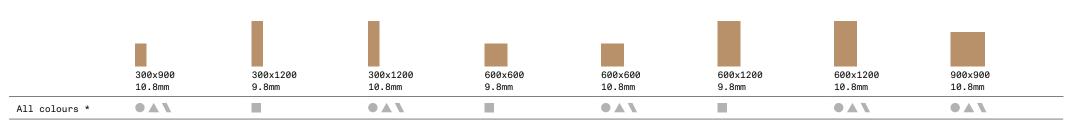





Matt R10 (A) Finish



Polished Finish



Anti Slip Stone R12 (A+B+C) Finish



Textured R11 (A+B+C) Finish

NOTES

To avoid lippage we recommend the use of self-levelling spacers.

^{*} Selected colours: Carina and Elent, are not available in Polished 50x600x9.8mm.

APPEARANCE

Limestone

MATERIAL

Porcelain

USAGE

Floors and Walls

SPECIAL PIECES

Available in all colours.

For more information contact our sales team.


SKIRTING

70x300mm 70x300mm 70x900mm



STEP TREADS

300x300mm 300x600mm




GROOVED STEPS

300x300mm 300x600mm 600x600mm



STEP WITH RISER PIECES

300x300mm 300x600mm 600x600mm



BULLNOSE STEP TREADS

300x300mm 300x600mm 600x600mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

10. MOISTURE EXPANSION

No rating

3. WATER ABSORPTION

≤ 0.03%

12. FROST RESISTANCE

Conforms

4. FLEXURAL STRENGTH

45 N/mm²

13. CHEMICAL RESISTANCE

Conforms

6. DEEP ABRASION RESISTANCE

109 mm³

14. STAIN RESISTANCE

Class 5

8. LINEAR THERMAL EXPANSION

7x10⁻⁶ °C

SLIP RESISTANCE (DIN 51130-51097)

Matt R10 (A) Textured R11 (A+B+C) Anti Slip Stone R12 (A+B+C)

9. THERMAL SHOCK RESISTANCE

Conforms

MANUFACTURER CERTIFICATIONS:

EPD: Available ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2025. 011.



Pre-consumer