

12 COLOURS | 3 FINISHES | 4 SIZES

Technici Gres 4

S
O
LUS



Technici Gres 4

Practical everyday style ideally suited for commercial projects, Technici Gres 4 is a highly technical range of porcelain floor and wall tiles available in a variety of colours and sizes.



Floor:
2RPV419

Technici Gres 4



ABOVE

Floor:
2RPV408
2RPV450

RIGHT

Wall:
2RPV408
2RPV450

Floor:
2RPV408
2RPV450





Felinfach
2RPV408



Dehar
2RPV535



Piling
2RPV549



Lachen
2RPV458



Merthyr
2RPV412




Jazmin
2RPV537



Nethy
2RPV419



Cohen
2RPV540

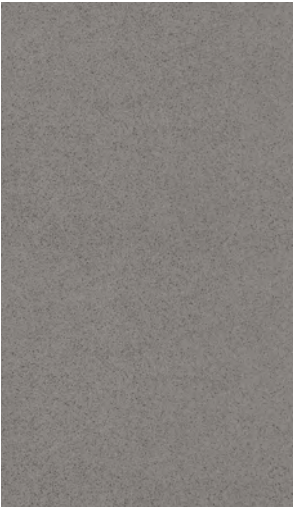

Bunker
2RPV449



Llandovery
2RPV410



Landsale
2RPV505



Dusken
2RPV450

SIZES AND FINISHES

	 200x200 8.3mm	 300x300 8.3mm	 300x600 9.2mm	 600x600 10.5mm
 Felinfach	● △	● ▲ △	●	●
 Dehar		●		
 Piling	● △	●		
 Lachen		●		
 Merthyr	● △	● ▲		
 Jazmin		●		
 Nethy		●		
 Cohen	●	● ▲		
 Bunker	● △	● ▲ △	●	●
 Llandovery		●		
 Landsale	● △	● ▲ △		
 Dusken		●		

● Matt R10 (A+B) ▲ Textured R11 (A+B+C) △ Anti Slip R12 (A+B+C)



Anti Slip R12 (A+B+C)



Textured R11 (A+B+C)

Technici Gres 4

APPEARANCE
Speckled


MATERIAL
Porcelain

USAGE
Floors and Walls


SHADE VARIATION
V1 - Uniform

SPECIAL PIECES
For more information contact our sales team.

STEP TREAD
297x297x8 . 3mm
297x597x9 . 2mm



CUT SKIRTING BOARD ROUNDED EDGE
95x297mm
95x597mm



PRESSED COVE BASE SIT-IN
297x297x8 . 3mm
297x597x9 . 2mm



**INTERNAL/EXTERNAL ANGLE
FOR COVE BASE**
25x97x8 . 3mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY
Conforms

3. WATER ABSORPTION
≤ 0.08%

4. FLEXURAL STRENGTH
35 N/mm²

6. DEEP ABRASION RESISTANCE
130 mm³

8. LINEAR THERMAL EXPANSION
7x10⁻⁶ °C

9. THERMAL SHOCK RESISTANCE
Conforms

10. MOISTURE EXPANSION
No rating

12. FROST RESISTANCE
Conforms

13. CHEMICAL RESISTANCE
No rating

14. STAIN RESISTANCE
Class 2

**SLIP RESISTANCE
(DIN 51130-51097)**
Matt R10 (A+B)
Textured R11 (A+B+C)
Anti Slip R12 (A+B+C)

MANUFACTURER CERTIFICATIONS:

EPD: Available
ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request. All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2025. 010b.

 Up to 35.7%
Pre-consumer