

12 COLOURS | 3 FINISHES | 6 SIZES

# Technici Gres 4

S  
LUS



Floor:  
2RPV449

# Technici Gres 4

Practical everyday style ideally suited for commercial projects, Technici Gres 4 is a highly technical range of porcelain floor and wall tiles available in a variety of colours and sizes.



Floor:  
2RPV419

# Technici Gres 4



ABOVE  
Floor:  
2RPV408  
2RPV450

RIGHT  
Wall:  
2RPV408  
2RPV450  
Floor:  
2RPV408  
2RPV450





Felinfach  
2RPV408



Dehar  
2RPV535



Piling  
2RPV549



Lachen  
2RPV458



Merthyr  
2RPV412



Jazmin  
2RPV537




Nethy  
2RPV419



Cohen  
2RPV540



Bunker  
2RPV449

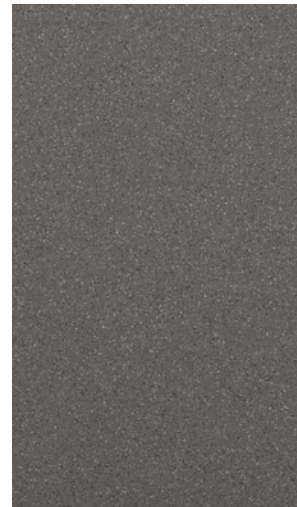

Llandoverly  
2RPV410





















Landsale  
2RPV505



Dusken  
2RPV450

## SIZES AND FINISHES

	 100x100 8.3mm	 200x200 8.3mm	 200x200 12mm	 300x300 8.3mm	 300x600 9.2mm	 600x600 10.5mm
 Felinfach	●	● △		● ▲ △	●	●
 Dehar				●		
 Piling	●	● △ ▲	● △	● ▲		
 Lachen				●		
 Merthyr	●	● ▲ △		● ▲		
 Jazmin				●		
 Nethy				●		
 Cohen	●	● ▲ △		● ▲		
 Bunker	●	● ▲ △	● △	● ▲ △	●	●
 Llandoverly				●		
 Landsale	●	● ▲ △		● ▲ △		
 Dusken				●		

● Matt R10 (A+B)    ▲ Textured R11 (A+B+C)    △ Anti Slip R12 (A+B+C)



Anti Slip R12 (A+B+C)



Textured R11 (A+B+C)

# Technici Gres 4

## APPEARANCE

Speckled

## MATERIAL

Porcelain

## USAGE

Floors and Walls

## SHADE VARIATION

V1 - Uniform


## SPECIAL PIECES

For more information contact our sales team.

### STEP TREAD

297x297x8 . 3mm


297x597x9 . 2mm



### CUT SKIRTING BOARD ROUNDED EDGE

95x297mm


95x597mm



### PRESSED COVE BASE SIT-IN

297x297x8 . 3mm

297x597x9 . 2mm



### INTERNAL/EXTERNAL ANGLE FOR COVE BASE

25x97x8 . 3mm



## ISO 10545 RESULTS

### 2. DIMENSIONS AND SURFACE QUALITY

Conforms

### 3. WATER ABSORPTION

$\leq 0.08\%$

### 4. FLEXURAL STRENGTH

35 N/mm<sup>2</sup>

### 6. DEEP ABRASION RESISTANCE

130 mm<sup>3</sup>

### 8. LINEAR THERMAL EXPANSION

$7 \times 10^{-6} \text{ } ^\circ\text{C}$

### 9. THERMAL SHOCK RESISTANCE

Conforms

### 10. MOISTURE EXPANSION

No rating

### 12. FROST RESISTANCE

Conforms

### 13. CHEMICAL RESISTANCE

No rating

### 14. STAIN RESISTANCE

Class 2

### SLIP RESISTANCE (DIN 51130-51097)

Matt R10 (A+B)

Textured R11 (A+B+C)

Anti Slip R12 (A+B+C)

## MANUFACTURER CERTIFICATIONS:

EPD: Available

ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2026. 011.

