

Tectra

5 COLOURS | 5 FINISHES | 7 SIZES



S
O
L
U
S

Floor:
2TCT102

A robust limestone-effect surface with five finishes, from natural to flamed. Crafted for both interiors and demanding outdoor applications.



Floor:
2TCT104
Wall:
2TCT104



ABOVE
Floor:
2TCT102
Wall:
2TCT102

RIGHT
Wall:
2TCT103



ABOVE
Wall:
2TCT104



TCT-Cream
2TCT101



TCT-Beige
2TCT101



TCT-Grey
2TCT103



TCT-Green
2TCT105




TCT-Black
2TCT104




Floor:
2TCT101
Wall:
2TCT103


SIZES AND FINISHES

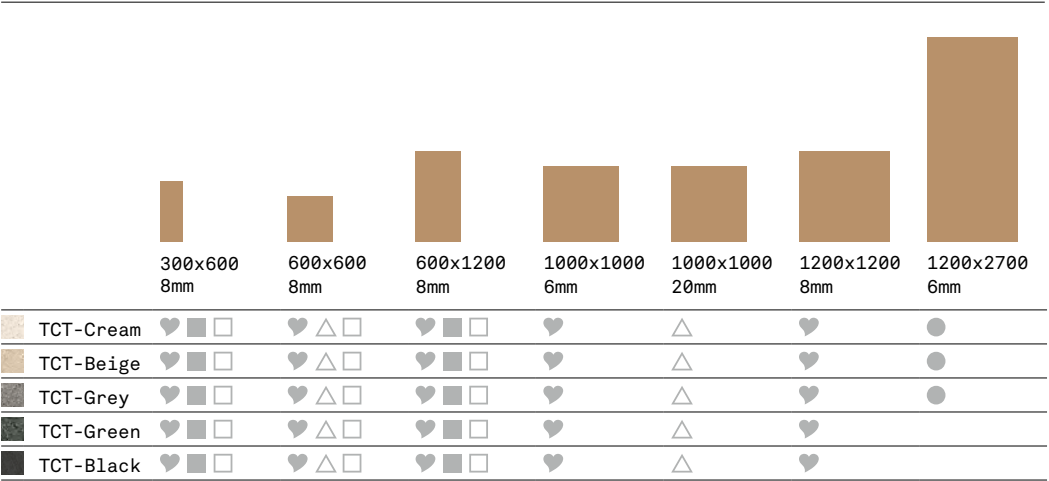



♥ Natural R10 (A+B) ● Natural R9 (A) △ Anti Slip R11 (A+B+C)
■ Textured R10 (A+B) □ Textured Flamed R10 (A+B)



Textured R10 (A+B)
Finish



Textured Flamed R10 (A+B)
Finish

APPEARANCE Limestone	SPECIAL PIECES For more information contact our sales team.
MATERIAL Porcelain	
USAGE Floors and Walls	BATTISCOPIA 65x600mm
SHADE VARIATION V3 - Moderate	
	GRADINO L JOLLY * 300x1200mm
	
NOTES	
	* Produced in 2 assembled pieces.

ISO 10545 RESULTS	
2. DIMENSIONS AND SURFACE QUALITY Conforms	10. MOISTURE EXPANSION No rating
3. WATER ABSORPTION ≤ 0.1%	12. FROST RESISTANCE Conforms
4. FLEXURAL STRENGTH 49 N/mm²	13. CHEMICAL RESISTANCE Conforms
6. DEEP ABRASION RESISTANCE 140 mm³	14. STAIN RESISTANCE Class 5
8. LINEAR THERMAL EXPANSION 6.5 x 10 ⁻⁶ °C	SLIP RESISTANCE (DIN 51130-51097) Natural R9 (A) Natural R10 (A+B) Textured R10 (A+B) Textured Flamed R10 (A+B) Anti Slip R11 (A+B+C)
9. THERMAL SHOCK RESISTANCE Conforms	

MANUFACTURER CERTIFICATIONS:



EPD: Available
ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request. All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2025. 001.