

Terratek

4 COLOURS | 2 FINISHES | 6 SIZES | 1 MOSAIC



S
O
LUS



Floor:
2GXJ102

Terratek

Inspired by the diverse nature of buzzing, metropolitan environments, Terratek features four colours that tell a rich story of modern city life.

S
O
LUS

Solus Plus ranges are responsibly sourced in line with the BES 6001 standard.

For more information, [click here](#)

S
O
LUS



Floor:
2GXJ101
Wall:
2GXJ101






Anatomic
2GXJ101



Organic
2GXJ103



Formative
2GXJ102

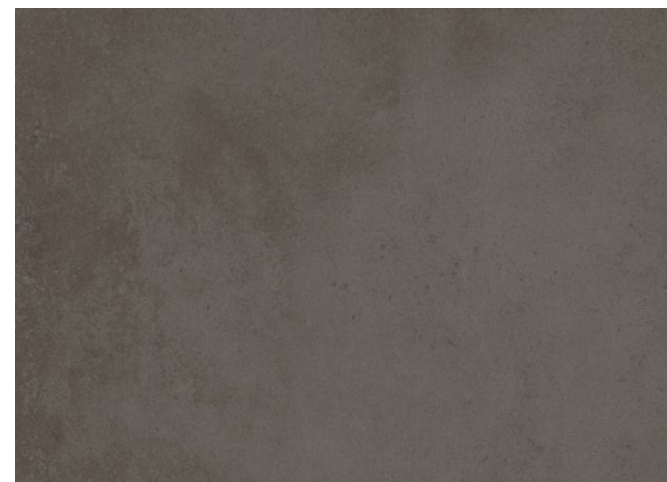

Monument
2GXJ104



Floor:
2GXJ103
Wall:
2GXJ103
2GXJ103m103

SIZES AND FINISHES

						
	300x600 9mm	450x900 9mm	600x600 9mm	600x600 20mm	900x900 9mm	900x900 20mm
All colours	♥ △	♥ △	♥ △	△	♥ △	△
						♥ Natural R9 △ Anti Slip R11 (A)


MOSAICS



Anatomic Mosaic
2GXJ101m101
300x300x9mm (60x60)
Natural R9
Anti Slip R11 (A)



Organic Mosaic
2GXJ103m103
300x300x9mm (60x60)
Natural R9
Anti Slip R11 (A)



Formative Mosaic
2GXJ102m102
300x300x9mm (60x60)
Natural R9
Anti Slip R11 (A)



Monument Mosaic
2GXJ104m104
300x300x9mm (60x60)
Natural R9
Anti Slip R11 (A)

APPEARANCE
Concrete


MATERIAL
Porcelain

USAGE
Floors and Walls


SHADE VARIATION
V4 - Heavy

SPECIAL PIECES
Available in all colours.
For more information contact our sales team.


BATTISCOPA
90x600mm
90x900mm




STEP TREAD
300X600mm
300x900mm



GRADONE
330x900mm



ANGOLARE
330x900mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY
Conforms

3. WATER ABSORPTION
< 0.1%

4. FLEXURAL STRENGTH
> 45 N/mm²

6. DEEP ABRASION RESISTANCE
No rating

8. LINEAR THERMAL EXPANSION
6x10⁻⁶ °C

9. THERMAL SHOCK RESISTANCE
No rating

10. MOISTURE EXPANSION
No rating

12. FROST RESISTANCE
Conforms

13. CHEMICAL RESISTANCE
Conforms

14. STAIN RESISTANCE
Conforms

SLIP RESISTANCE
(DIN 51130-51097)
Natural R9
Anti Slip R11 (A)

CERTIFICATIONS:



EPD: Available
ISO 14001
SASO-Approved

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request. All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2026. 011.

The logo consists of the word "SOLUS" in a large, white, sans-serif font, stacked vertically. To the right of the "O" is a green circular icon containing a white plus sign (+). The background of the entire page is a photograph of large mounds of brown soil or sand, with a vertical wooden plank standing in the center.

SOLUS

About Solus Plus

Solus Plus is our new mark of assurance for responsibly sourced products. Built on the rigorous standards of BES 6001, it highlights collections produced by factories that demonstrate industry-leading sustainability across their entire supply chain, from raw material extraction to final delivery.

When specified through Solus, these products can contribute valuable credits toward BREEAM, LEED and WELL certification, helping you meet your environmental targets without compromising on quality or design. Look for the Solus Plus symbol to specify with confidence.

[Visit our website to learn more.](#)

[Back to top](#)