

Touchwood

4 COLOURS | 2 FINISHES | 3 SIZES | 1 MOSAIC | 1 DECOR



SO
LUS



Floor:
3TOU103
Wall:
3TOU103

Touchwood

Recreate the warm and welcoming ambience of organic patterns of planed Birch, Maple, Oak, and Elm, with this timeless collection modelled on salvaged boards from traditional Alpine lodges.



S
O
LUS



Solus Plus ranges are responsibly sourced in line with the BES 6001 standard.

For more information, [click here](#)

Floor:
3TOU103D103




Floor:
3TOU104



TOU-Birch
3TOU101



TOU-Maple
3TOU102

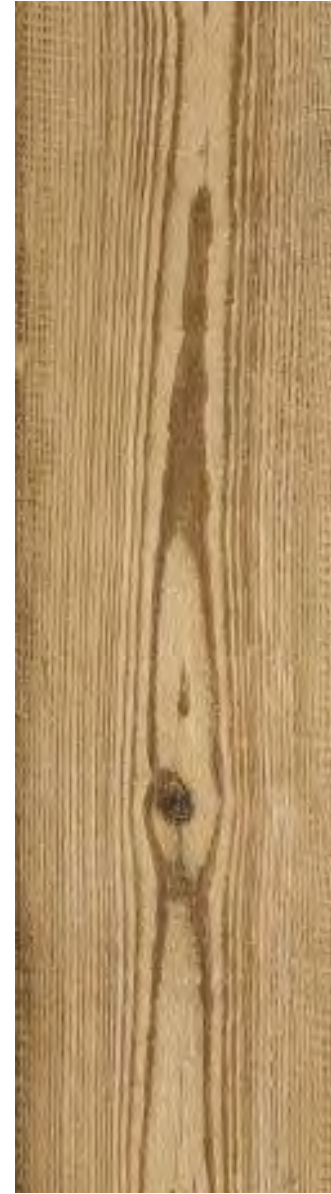

TOU-Oak
3TOU103



TOU-Elm
3TOU104



Floor:
3TOU102M102
Wall:
3TOU102M102

SIZES AND FINISHES

	150x900 9mm	250x1500 9mm	300x1200 20mm
TOU-Birch	●	●	△
TOU-Mapel	●	●	
TOU-Oak	●	●	
TOU-Elm	●	●	△

● Matt R10 (A+B) △ Anti Slip R11 (A+B+C)

NOTES

To avoid lippage we recommend the use of self-levelling spacers.

MOSAICS



TOU-Birch Mosaic
3TOU101M101
362x412x9mm
Matt R10 (A+B)



TOU-Mapel Mosaic
3TOU102M102
362x412x9mm
Matt R10 (A+B)



TOU-Oak Mosaic
3TOU103M103
362x412x9mm
Matt R10 (A+B)



TOU-Elm Mosaic
3TOU104M104
362x412x9mm
Matt R10 (A+B)


DECORS



TOU-Birch Decor
3TOU101D101
216x250x9 Hexagon
Matt R10 (A+B)



TOU-Mapel Decor
3TOU102D102
216x250x9 Hexagon
Matt R10 (A+B)

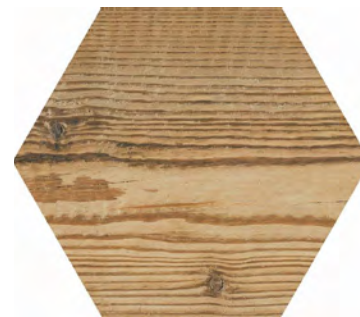

TOU-Oak Decor
3TOU103D103
216x250x9 Hexagon
Matt R10 (A+B)



TOU-Elm Decor
3TOU104D104
216x250x9 Hexagon
Matt R10 (A+B)

APPEARANCE

Wood

MATERIAL

Porcelain

USAGE

Floors and Walls

SHADE VARIATION

V4 - Heavy

SPECIAL PIECES

Available in all colours.

For more information contact our sales team.

BATTISCOPIA


70x900mm



CHALET

150x900x9mm

120x750x9mm



* Suitable for Walls only

ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

3. WATER ABSORPTION

≤ 0.2%

4. FLEXURAL STRENGTH

> 35 N/mm²

6. DEEP ABRASION RESISTANCE

< 175 mm³

8. LINEAR THERMAL EXPANSION

< 7x10⁻⁶ °C

9. THERMAL SHOCK RESISTANCE

Conforms

10. MOISTURE EXPANSION

≤ 0.01 % (0.1 mm/m)

12. FROST RESISTANCE

Conforms

13. CHEMICAL RESISTANCE

Conforms

14. STAIN RESISTANCE

Conforms

SLIP RESISTANCE (DIN 51130-51097)

Matt R10 (A+B)

Anti Slip R11 (A+B+C)

CERTIFICATIONS:

Declare.



EPD: Available
ISO 14001
ISO 17889-1
SASO-Approved

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request. All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2025. 004.

The logo consists of the word "SOLUS" in a large, white, sans-serif font, stacked vertically. To the right of the middle letter "O" is a green circular icon containing a white plus sign (+).

S
O
LUS

About Solus Plus

Solus Plus is our new mark of assurance for responsibly sourced products. Built on the rigorous standards of BES 6001, it highlights collections produced by factories that demonstrate industry-leading sustainability across their entire supply chain, from raw material extraction to final delivery.

When specified through Solus, these products can contribute valuable credits toward BREEAM, LEED and WELL certification, helping you meet your environmental targets without compromising on quality or design. Look for the Solus Plus symbol to specify with confidence.

[Visit our website to learn more.](#)

[Back to top](#)