

Travertine 1

11 COLOURS | 3 FINISHES | 4 SIZES | 2 MOSAICS



S
O
L
U
S

Project: Solus
Clerkenwell Showroom

Floor:
3SCT0033

Travertine 1

A high-performance surface with excellent technical qualities and a favourite of specifiers globally.



Project: University
of West London

Floor:
3SCT0031

Travertine 1



Project: University of
Warwick - Mathematical
Sciences Building

Floor:
3SCT0033
3SCT0047

Travertine 1




Project: The Terrace,
Wimbledon

ABOVE


Floor:
3SCT0044
3SCT0049

RIGHT

Floor:
3SCT0044
3SCT0049

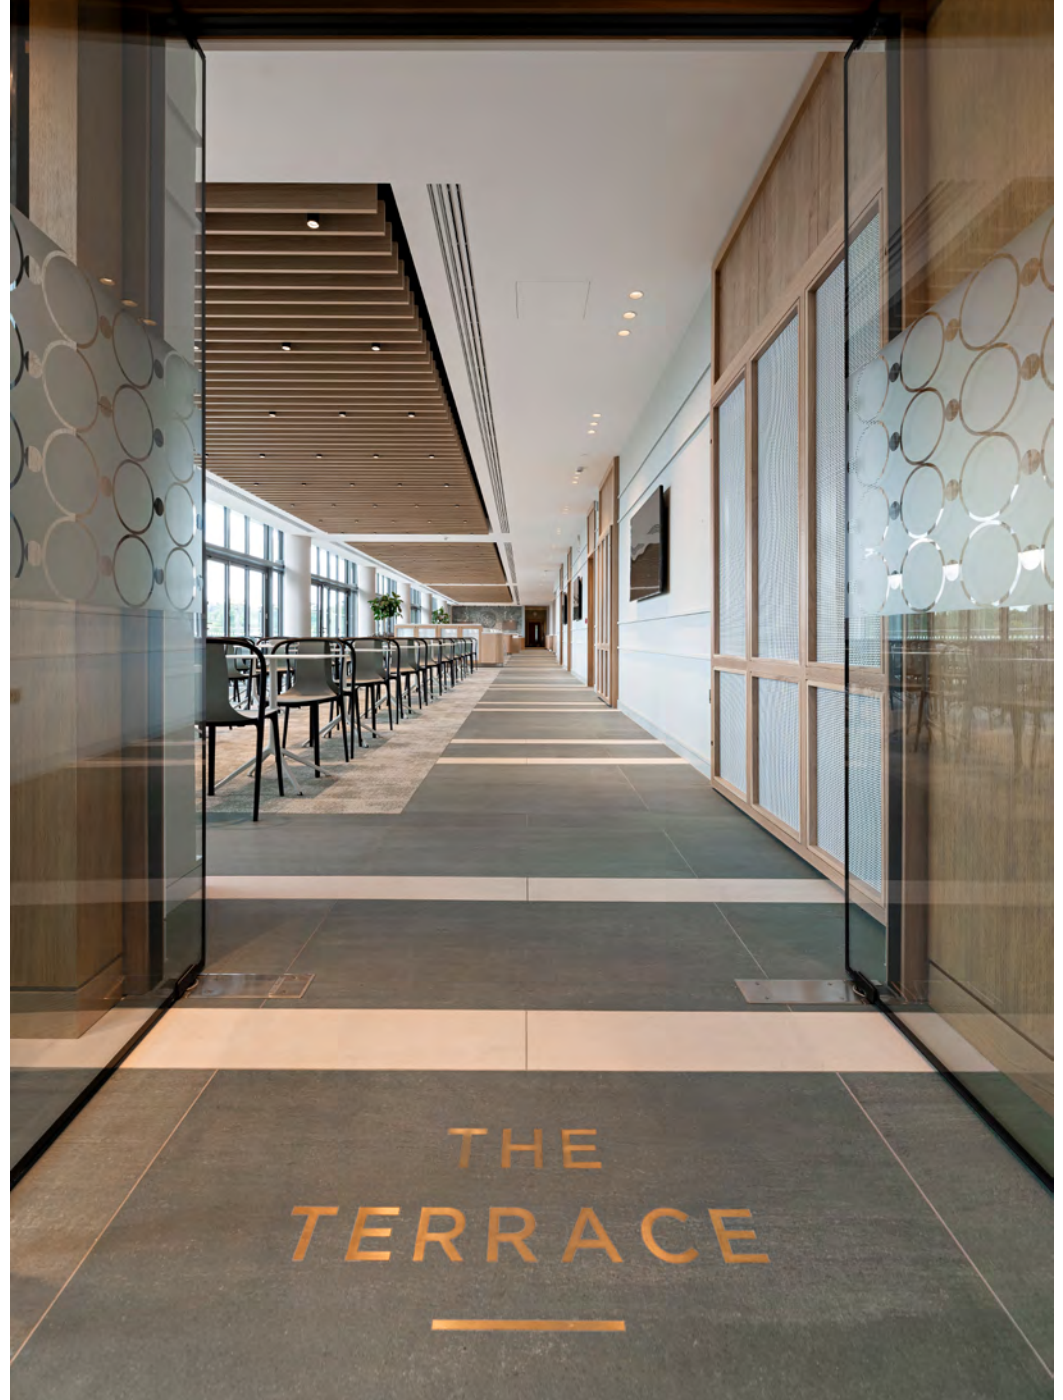

Travertine 1




Asus
3SCT0049



Sumac
3SCT0033



Staran
3SCT0032



Motion
3SCT0047



Abyss
3SCT0031



Liquorice
3SCT0030



Ture
3SCT0034



Goma
3SCT0036



Tamar
3SCT0035



Nigella
3SCT0044







Gano
3SCT0042



Project: Edgbaston Priory
Tennis Club

Wall:
3SCT0033

SIZES AND FINISHES

| | | | | |
|-------------|---|---|---|---|
| |  |  |  |  |
| | 150x150 9.4mm | 300x300 9.4mm | 300x600 9.4mm | 600x600 9.4mm |
| All colours | ● | ● △ | ● ■ △ | ● ■ △ |
| | ● Matt R9 (Matt R10 on request) | ■ Polished | △ Textured R11 (A+B) | |



Textured R11 (A+B)

MOSAICS



Mosaic A
300x300mm (28x28)
Polished finish
Available in all
colours



Mosaic D
300x300mm (15x300)
Textured
Available in all
colours

NOTES

To avoid lippage we recommend the use of self-levelling spacers.

Travertine 1

APPEARANCE
Travertine

MATERIAL
Porcelain

USAGE
Floors and Walls


SHADE VARIATION
V3 - Moderate

SPECIAL PIECES
More special pieces available.
For more information contact our sales team.


BULLNOSE
90x300mm
90x600mm



ANGOLARE
300x330mm
330x600mm



GRADONE
300x330mm
330x600mm




STEP TREAD
300x300mm
300x600mm
300x1200mm



GRADONE/ ANGOLARE TORO
NON-SLIP EDGE
330x600mm



GRADONE/ ANGOLARE TORO
330x600mm
330x1200mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY
Conforms

3. WATER ABSORPTION
 $\leq 0.1\%$

4. FLEXURAL STRENGTH
45 N/mm²

6. DEEP ABRASION RESISTANCE
 ≤ 150 mm³

8. LINEAR THERMAL EXPANSION
 6×10^{-6} °C

9. THERMAL SHOCK RESISTANCE
No rating

10. MOISTURE EXPANSION
No rating

12. FROST RESISTANCE
Conforms

13. CHEMICAL RESISTANCE
Conforms

14. STAIN RESISTANCE
Conforms

SLIP RESISTANCE
(DIN 51130-51097)
Matt R9
Textured R11 (A+B)

MANUFACTURER CERTIFICATIONS:



EPD: Available
ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request. All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2024. 024.



Up to 45%
Pre-consumer