

# Trench



Trench

Inspired by traditional Italian architecture, Trench is a stunning range from Solus that offers the look of intensely structured granite, in the form of highly engineered porcelain.

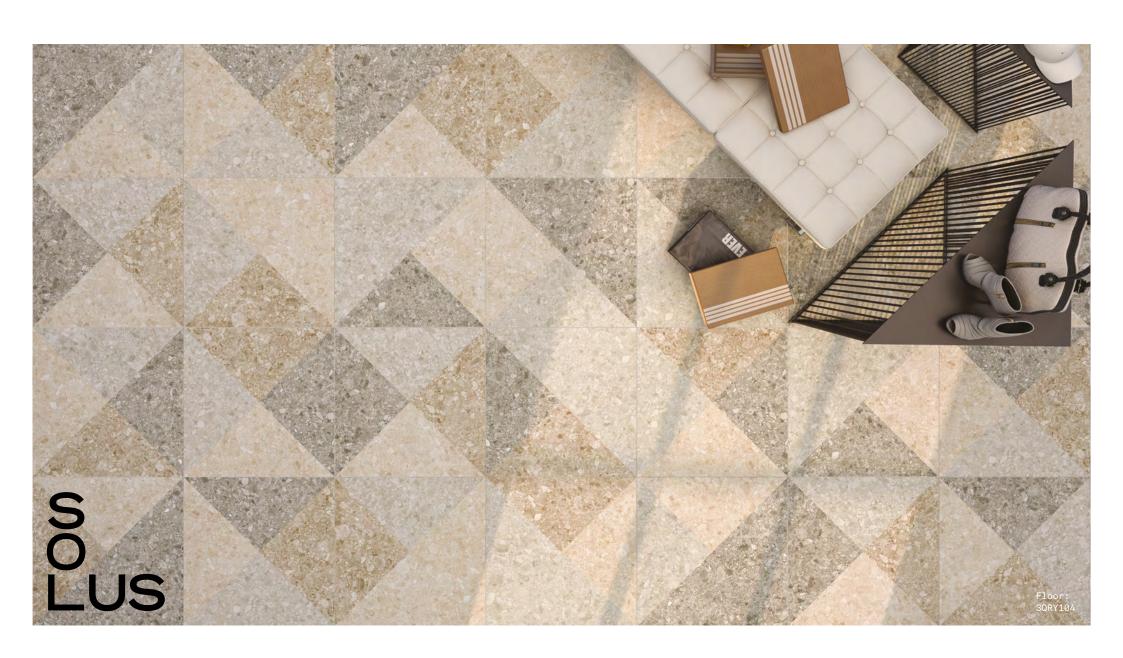

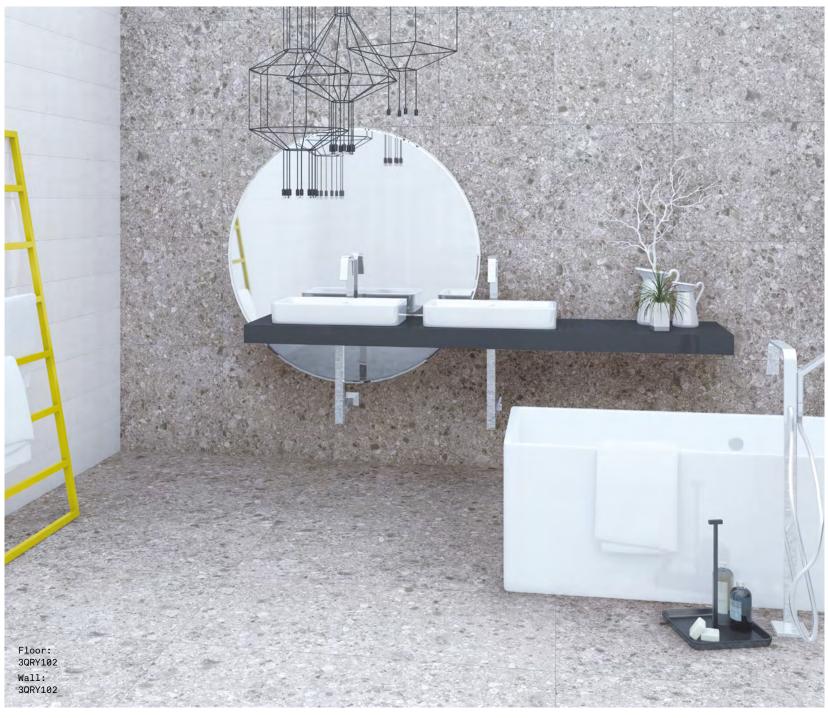

Wrysgan 3QRY101


Oakeley 3QRY102





Beckley 3QRY103

Clachan \* 3QRY104

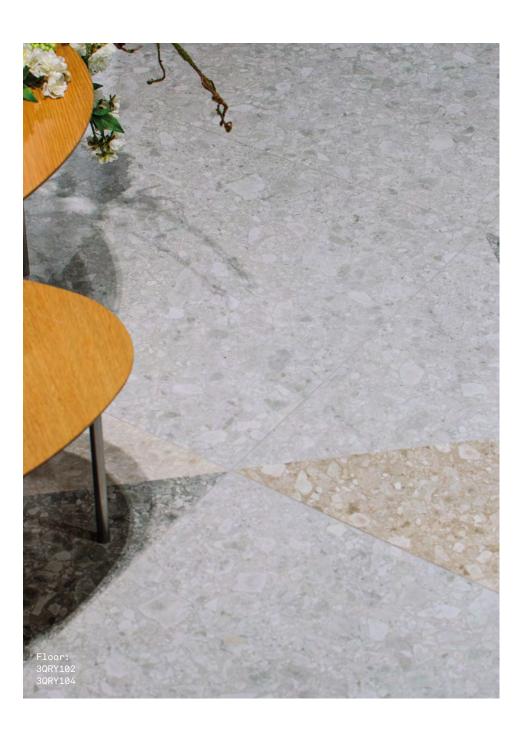

### SIZES AND FINISHES

	600×600	600×600	600×1200	1200×1200	
	10mm	20mm	11mm	11mm	
Wrysgan	\$		*		
Oakeley	<b>y</b>	$\triangle$	•	<b>y</b>	
Beckley	<b>y</b>	$\triangle$	•	<b>y</b>	
M Clachan	<b>y</b>				

#### NOTES

 $<sup>\</sup>mbox{{\tt ^{*}}}$  Clachan has many different designs that are randomly packed in boxes of three. Please ask for details.

## **Trench**

**APPEARANCE** 

Ceppo di Gre

MATERIAL

Porcelain

USAGE

Floors and Walls

SHADE VARIATION

V3 - Moderate


#### SPECIAL PIECES

Available in all colours.

For more information contact our sales team.

**SQUARE & ROUND TOP PLINTHS** 

94x600mm 94x1200mm



STEP TREADS

330x600mm 330x1200mm



GRADONE

330x600mm 330x1200mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY

Conforms

10. MOISTURE EXPANSION

No rating

3. WATER ABSORPTION

< 0.5%

12. FROST RESISTANCE

Conforms

4. FLEXURAL STRENGTH

> 35 N/mm<sup>2</sup>

13. CHEMICAL RESISTANCE

Conforms

6. DEEP ABRASION RESISTANCE

No rating

14. STAIN RESISTANCE

Conforms

8. LINEAR THERMAL EXPANSION

9x10<sup>-6</sup> °C

SLIP RESISTANCE (DIN 51130-51097)

Natural R9 Anti Slip R11 (A+B+C)

9. THERMAL SHOCK RESISTANCE

Conforms

MANUFACTURER CERTIFICATIONS:

EPD: Available

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request.

All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2023. 004a.



Pre-consumer

EC1M 5RJ