

Unison

6 COLOURS | 1 FINISH | 5 SIZES



S
O
L
U
S

Floor:
2SAK102
2SAK104
Bar:
2SAK102
2SAK104

Unison

Unison is a classic range of modular porcelain tiles available in five sizes and six colours, allowing unlimited compositions.



Floor:
2SAK101
2SAK102




ABOVE
Floor:
2SAK101
2SAK104

RIGHT
Floor:
2SAK101
2SAK102
2SAK103




ABOVE
Floor:
2SAK101
Wall:
2SAK105



Accord
2SAK102



Unanimity
2SAK103



Jointed
2SAK104



Together
2SAK105




Collaborate
2SAK106




Chorus
2SAK101

LAYOUT EXAMPLES


Tiles are designed to be modular with a 1.5mm joint

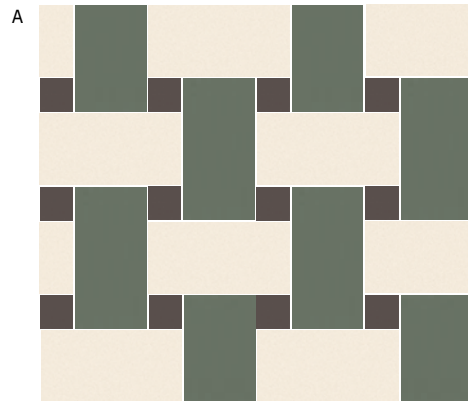


62x62mm Chorus 12%
125x250mm Accord 44%, Together 44%

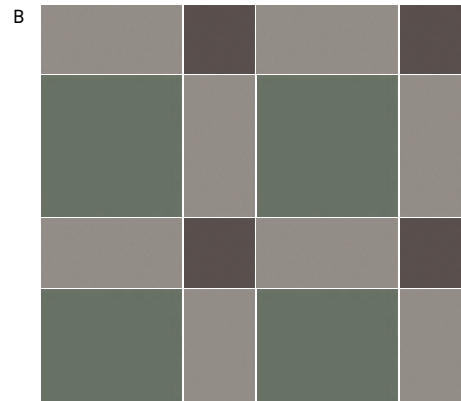


125x125mm Chorus 12%
125x250mm Collaborate 44%
250x250mm Together 44%

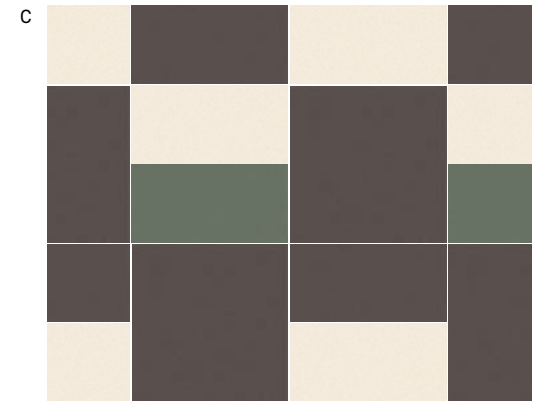


62x125mm Accord 25%, Chorus 12.5%, Together 12.5%
125x125mm Chorus 50%

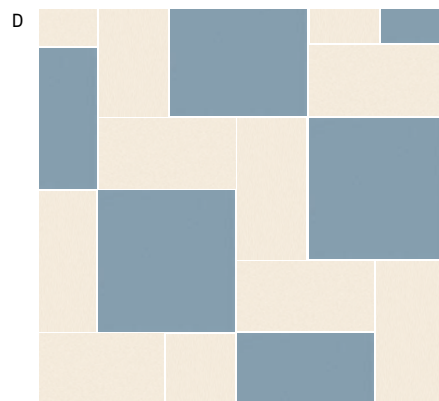

125x250mm Accord 50%
250x250mm Unanimity 50%

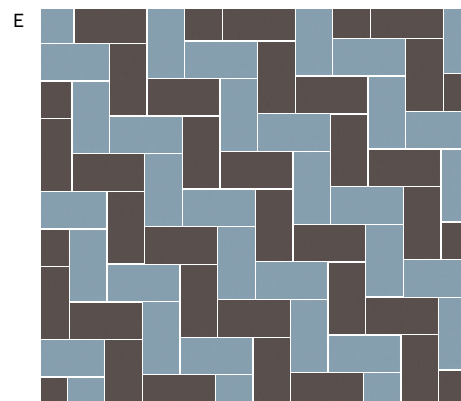


62x125mm Chorus 50%, Unanimity 50%

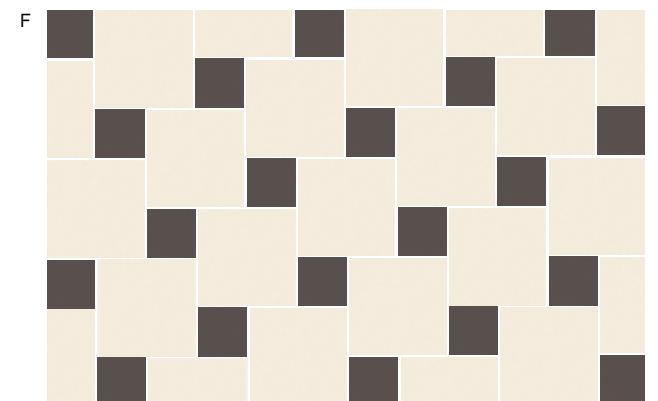


62x62mm Chorus 20%
125x125mm Accord 80%

LAYOUT EXAMPLES


Tiles are designed to be modular with a 1.5mm joint

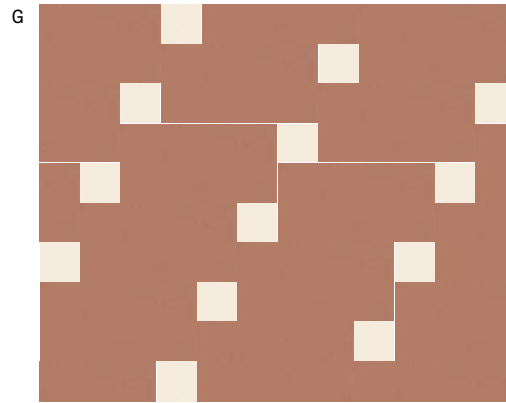


62x62mm Accord 20%
125x250mm Jointted 80%

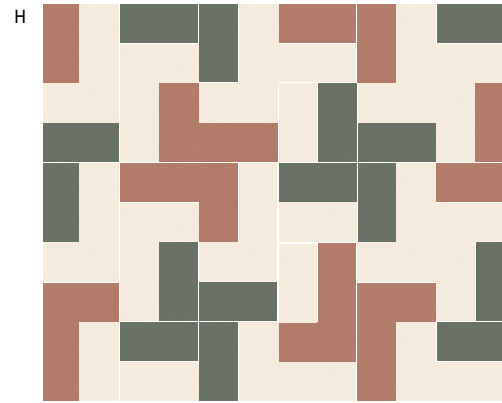


62x125mm Accord 50%, Jointed 25%, Together 25%

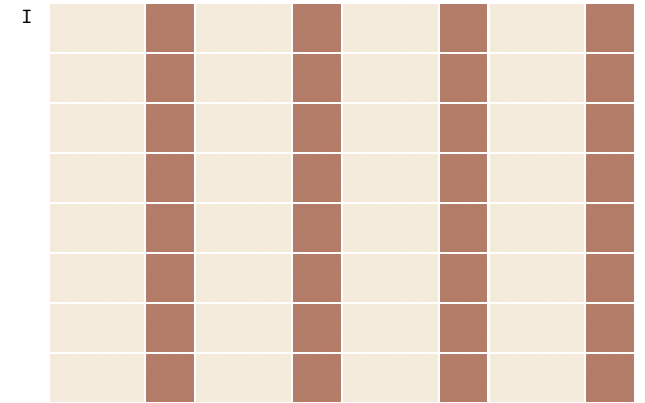


62x62mm Accord 66.6%
62x125mm Jointed 33.3%

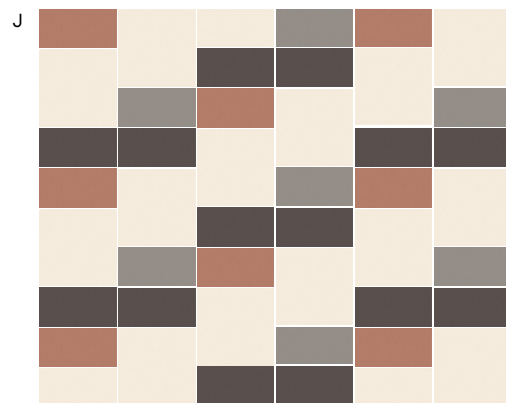

62x125mm Chorus 25%, Jointed 12.5%
62x62mm Collaborate 12.5%
125x125mm Accord 50%

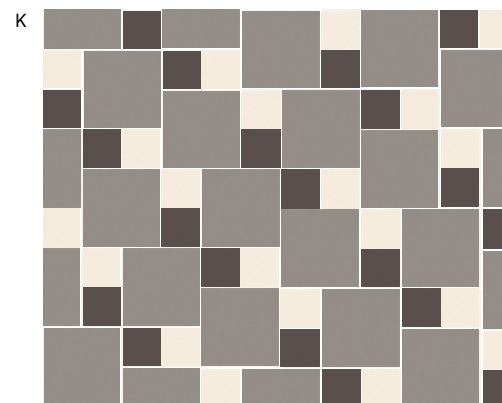

62x62mm Accord 16.5%, Chorus 16.5%
125x125mm Collaborate 67%

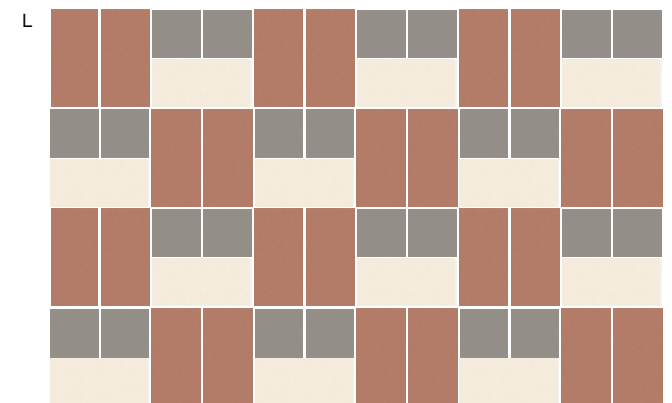

62x62mm Collaborate 25%
62x125mm Jointed 50%, Accord 25%



Floor:
2SAK101
2SAK102

LAYOUT EXAMPLES

Tiles are designed to be modular with a 1.5mm joint



62x62mm Accord 60%, Chorus 36%, Jointed 4%



Wall:
2SAK102
2SAK101
2SAK105

SIZES AND FINISHES

	62x62 8.5mm	62x125 8.5mm	125x125 8.5mm	125x250 8.5mm	250x250 8.5mm
All colours	●	●	●	●	●

● Matt

NOTES

Tiles are designed to be modular with a 1.5mm joint



APPEARANCE

Mono Colour

MATERIAL

Porcelain

USAGE

Floors and Walls

ISO 10545 RESULTS**2. DIMENSIONS AND SURFACE QUALITY**

Conforms

3. WATER ABSORPTION

> 0.5%

4. FLEXURAL STRENGTH35 N/mm²**6. DEEP ABRASION RESISTANCE**< 175 mm³**8. LINEAR THERMAL EXPANSION**

No rating

9. THERMAL SHOCK RESISTANCE

No rating

10. MOISTURE EXPANSION

No rating

12. FROST RESISTANCE

No rating

13. CHEMICAL RESISTANCE

Conforms

14. STAIN RESISTANCE

Conforms

**SLIP RESISTANCE
(DIN 51130)**

Matt R10

MANUFACTURER CERTIFICATIONS:

EPD: Available

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request. All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2023. 002a.