

# Wiltshire

9 COLOURS | 2 FINISHES | 6 SIZES | 1 MOSAIC



S  
LUS

Wall:  
2PDD102

# Wiltshire

High-performance extruded porcelain tiles, ideal for technical commercial projects. Suitable for use on both wall and floor areas.



Floor:  
2PDD105  
Wall:  
2PDD105



Hasfield  
2PDD103




Hindon  
2PDD112




Hodson  
2PDD108




Nettelton  
2PDD109




Startley  
2PDD110

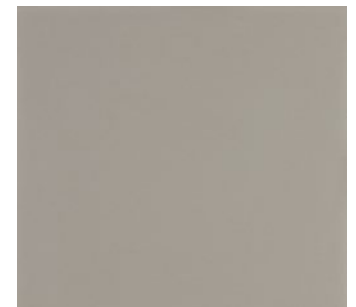


Kingscote  
2PDD102



Purton  
2PDD101



Randwick  
2PDD104

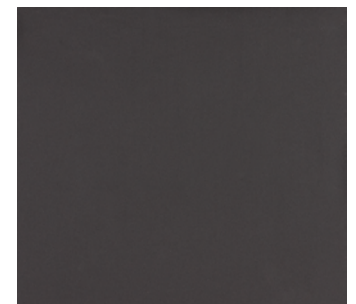
















Harnham  
2PDD105




Floor:  
2PDD101  
Wall:  
2PDD101

## SIZES AND FINISHES

	 100x100 8mm	 200x200 7mm	 300x300 8mm	 300x600 8mm	 450x450 8mm	 600x600 8mm
 Hasfield	♥ △	♥ △	♥ △	♥ △	♥ △	♥ △
 Hindon	♥ △		♥ △			
 Hodson	♥ △		♥ △			
 Nettelton	♥ △		♥ △			
 Startley	♥ △		♥ △			
 Kingscote	♥ △	♥ △	♥ △	♥ △	♥ △	♥ △
 Purton	♥ △	♥ △	♥ △	♥ △	♥ △	♥ △
 Randwick	♥ △	♥ △	♥ △	♥ △	♥ △	♥ △
 Harnham	♥ △	♥ △	♥ △	♥ △	♥ △	♥ △

♥ Natural R10 (A)    △ Anti Slip R11 (A+B)

## MOSAICS

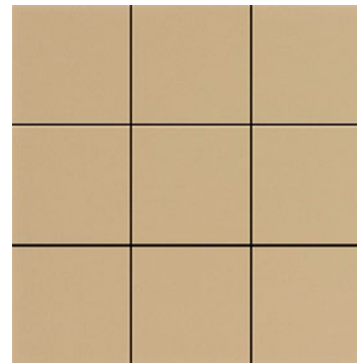

### Mosaic

Available in all colours  
300x300x8mm (100x100 Chip)  
Natural R10 (A)  
Anti Slip R11 (A+B)

## APPEARANCE

Mono Colour

## MATERIAL

Porcelain

## USAGE


Floors and Walls

## SPECIAL PIECES


Available in all colours.

For more information contact our sales team.


## SQUARE AND ROUND TOP PLINTHS



## SQUARE AND ROUND TOP PLINTHS



## SIT ON AND SIT IN SKIRTING



## ISO 10545 RESULTS

### 2. DIMENSIONS AND SURFACE QUALITY

Conforms

### 3. WATER ABSORPTION

< 0.5%

### 4. FLEXURAL STRENGTH

> 28-35 N/mm<sup>2</sup>

### 6. DEEP ABRASION RESISTANCE

< 150 mm<sup>3</sup>

### 8. LINEAR THERMAL EXPANSION

< 9X10<sup>-6</sup>K<sup>-1</sup>

### 9. THERMAL SHOCK RESISTANCE

Conforms

### 10. MOISTURE EXPANSION

No rating

### 12. FROST RESISTANCE

Conforms

### 13. CHEMICAL RESISTANCE

Conforms

### 14. STAIN RESISTANCE

Class 3

### SLIP RESISTANCE (DIN 51130-51097)

Natural R10 (A)

Anti Slip R11 (A+B)

## MANUFACTURER CERTIFICATIONS:

EPD: Available  
ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request. All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2024. 005a.