

Transpose

7 COLOURS | 2 FINISHES | 5 SIZES | 1 MOSAIC



S
O
LUS

Floor:
3SAL101


PLUS

Floor: 3SAL104





Floor:
3SAL106
Wall:
3SAL105

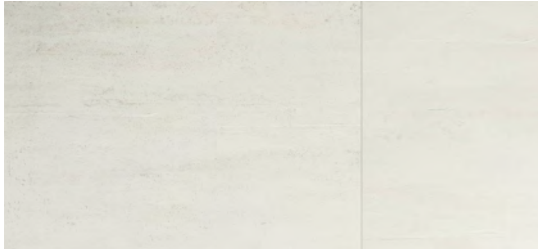

Altered
3SAL107




Reform
3SAL104




Scaled
3SAL103




Invert
3SAL102

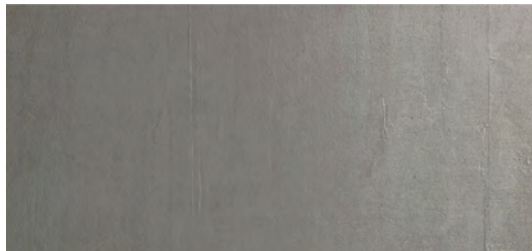

Convert
3SAL105

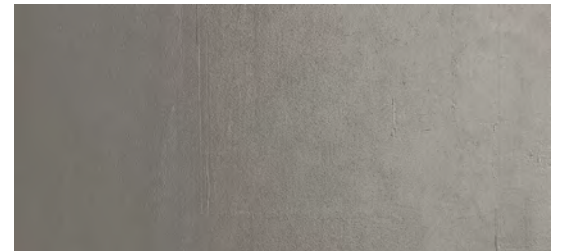

Switch
3SAL101

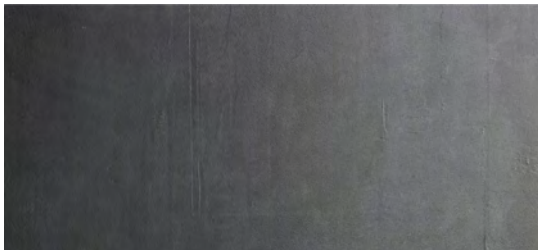






Tailor
3SAL106



Floor:
3SAL104

SIZES AND FINISHES

					
	100x600 8mm	150x600 8mm	300x600 8mm	600x600 8mm	600x1200 8mm
All colours	⊘ △	⊘ △	⊘ △	⊘ △	⊘ △

⊘ Natural Honed R10 (A) △ Anti Slip R11 (A+B+C)


NOTES

To avoid lippage we recommend the use of self-levelling spacers



Floor:
3SAL103

MOSAICS



Altered Mosaic
3SAL107M107
300x300x8mm (50x50 Chips)
Natural Honed R10 (A)




Reform Mosaic
3SAL104M104
300x300x8mm (50x50 Chips)
Natural Honed R10 (A)



Scaled Mosaic
3SAL103M103
300x300x8mm (50x50 Chips)
Natural Honed R10 (A)




Invert Mosaic
3SAL102M102
300x300x8mm (50x50 Chips)
Natural Honed R10 (A)



Convert Mosaic
3SAL105M105
300x300x8mm (50x50 Chips)
Natural Honed R10 (A)



Switch Mosaic
3SAL101M101
300x300x8mm (50x50 Chips)
Natural Honed R10 (A)



Tailor Mosaic
3SAL106M106
300x300x8mm (50x50 Chips)
Natural Honed R10 (A)

APPEARANCE
Slate

MATERIAL
Porcelain

USAGE
Floors and Walls


SHADE VARIATION
V2 - Light

SPECIAL PIECES
Available in all colours.
For more information contact our sales team.

BATTISCOPIA
90x600mm



GRADINO STEP
300x600mm



ISO 10545 RESULTS

2. DIMENSIONS AND SURFACE QUALITY
Conforms

3. WATER ABSORPTION
0.08%

4. FLEXURAL STRENGTH
49 N/mm²

6. DEEP ABRASION RESISTANCE
140mm³

8. LINEAR THERMAL EXPANSION
6.5x10⁻⁶ °C

9. THERMAL SHOCK RESISTANCE
Conforms

10. MOISTURE EXPANSION
No rating

12. FROST RESISTANCE
Conforms

13. CHEMICAL RESISTANCE
Conforms

14. STAIN RESISTANCE
Conforms

SLIP RESISTANCE
(DIN 51130-51097)
Natural Honed R10 (A)
Anti Slip R11 (A+B+C)

MANUFACTURER CERTIFICATIONS:



EPD: Available
ISO 14001

For LEED, BREEAM and WELL information, please ask for details. On request tiles can be tested to BS EN 16165:2021. HSE surface roughness and NCS Colour values are also available upon request. All sizes shown are nominal. Due to the printing process and differing screen values actual tile colours may vary. E&OE. © Solus Ceramics Limited 2025. 007a.

Up to 40%
Pre-consumer